

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Artika

Supplier's address: Customer service, 1756, 50th Avenue Montreal (Lachine), Quebec Canada, H8T 2V5

Model identifier: PDT-MA5C-5LONCH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		2 650 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 3 000 or 3 500 or 4 000 or 5 000
On-mode power (P_{on}), expressed in W		24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	2 020	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	569		
	Depth	569		


ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,463 0,420	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;


(b) '-': not applicable;

ATTACHMENT 2(S)

Spectral power distribution

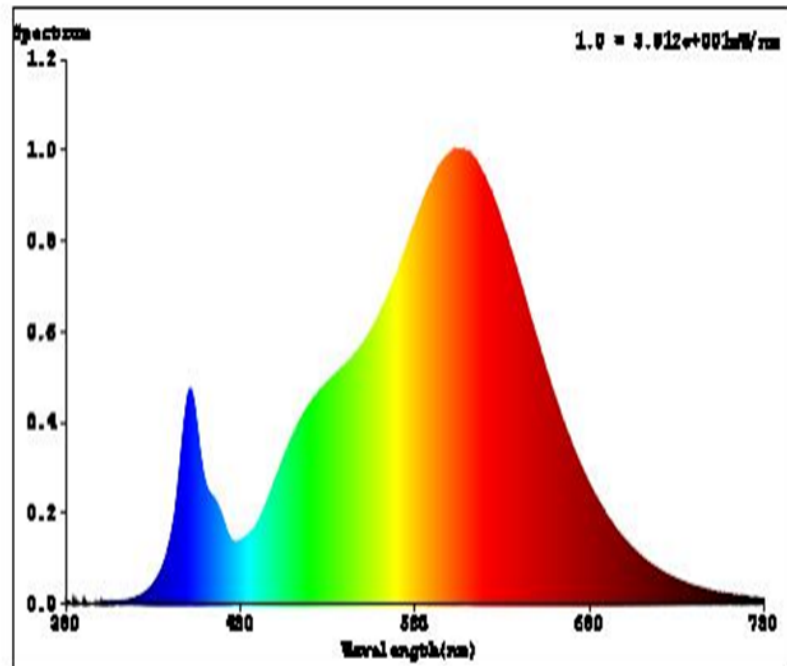

Model placed on the Union market from 12/08/2025



EPREL registration number: 2444553

<https://eprel.ec.europa.eu/qr/2444553>

Supplier: Artika for Living Europe B.V. (Importer)

Website:

Customer care service:

Name: Customer service

Website: <https://www.artika.com>

Email: support@artika.com

Phone: 1 866 661-9606

Address:

1756, 50th Avenue Montreal (Lachine), Quebec Canada, H8T 2V5