

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** AURORA

**Supplier's address:** Aurora Lighting UK Limited, 6 LITTLE BURROW, AL7 4SW WELWYN GARDEN CITY, UK

**Model identifier:** AU-FLV50CS

## Type of light source:

|                                                     |                |                                 |     |
|-----------------------------------------------------|----------------|---------------------------------|-----|
| Lighting technology used:                           | LED            | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LED |                                 |     |
| Mains or non-mains:                                 | MLS            | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No             | Envelope:                       | -   |
| High luminance light source:                        | No             |                                 |     |
| Anti-glare shield:                                  | No             | Dimmable:                       | No  |


## Product parameters

| Parameter                                                                                                                                             | Value                     | Parameter                                                                                                                                                  | Value                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>General product parameters:</b>                                                                                                                    |                           |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 50                        | Energy efficiency class                                                                                                                                    | C                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 4 675 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 30,0                      | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                         | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height                    | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                     |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                     |                                                                                                                                                            |                        |

|                                                                                                                         |       |                                                                    |                |  |
|-------------------------------------------------------------------------------------------------------------------------|-------|--------------------------------------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |       |                                                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -     | If yes, equivalent power (W)                                       | -              |  |
|                                                                                                                         |       | Chromaticity coordinates (x and y)                                 | 0,380<br>0,380 |  |
| <b>Parameters for directional light sources:</b>                                                                        |       |                                                                    |                |  |
| Peak luminous intensity (cd)                                                                                            | 2 086 | Beam angle in degrees, or the range of beam angles that can be set | 110            |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |       |                                                                    |                |  |
| R9 colour rendering index value                                                                                         | 1     | Survival factor                                                    | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96  |                                                                    |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |       |                                                                    |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90  | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b)  | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 1,0   | Stroboscopic effect metric (SVM)                                   | 0,0            |  |


(a) '-': not applicable;

(b) '-': not applicable;

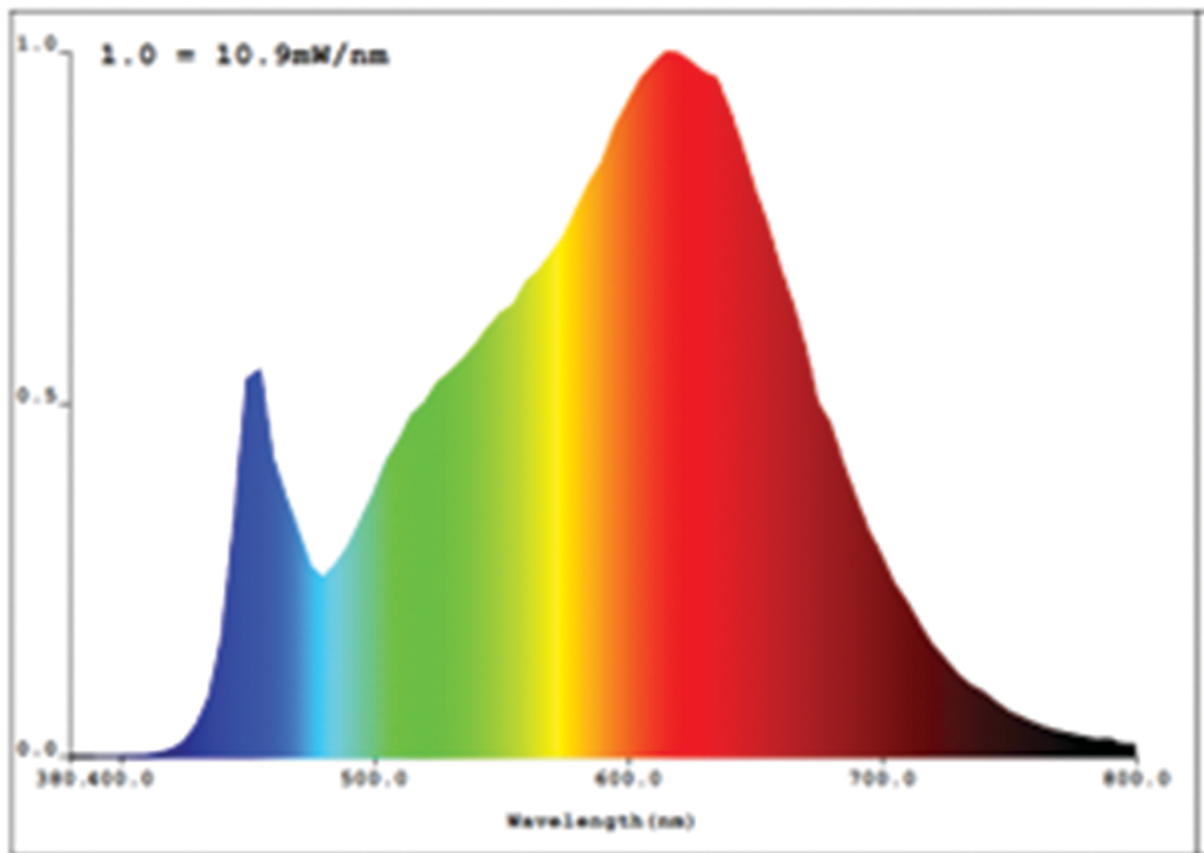

**EPREL registration number:** 2486053

Model placed on the Union market from 29/09/2025.



<https://eprel.ec.europa.eu/qr/2486053>

**Supplier:** MIIDEX LIGHTING (Manufacturer)

**Website:** <https://www.miidex.com/>

**Customer care service:**

**Name:** Aurora Lighting UK Limited

**Website:** <https://auroralighting.com/>

**Email:** [technical@auroralighting.com](mailto:technical@auroralighting.com)

**Phone:** 01707351859

**Address:**

6 LITTLE BURROW  
AL7 4SW WELWYN GARDEN CITY  
United Kingdom