Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Nova Life

Supplier's address: Customer support, Vestvollveien 34b, 2019 Skedsmokorset, NO

Model identifier: 11000000486

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	1 800 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	20,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control — Height	1 500	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	230		
Outer dimensions without separate control gear, lighting control — Depth	230		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,461 0,416
Parameters for directional light sources:				
Peak luminous intensity (cd)		613	Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:				
R9 colour rendering index value		36	Survival factor	1,00
the lumen maintenance factor		0,95		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

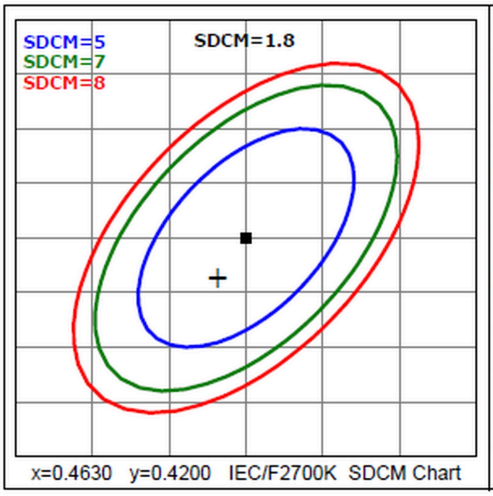
SDCM=5
SDCM=7
SDCM=8
SDCM=1.8
x=0.4630 y=0.4200 IEC/F2700K SDCM Chart

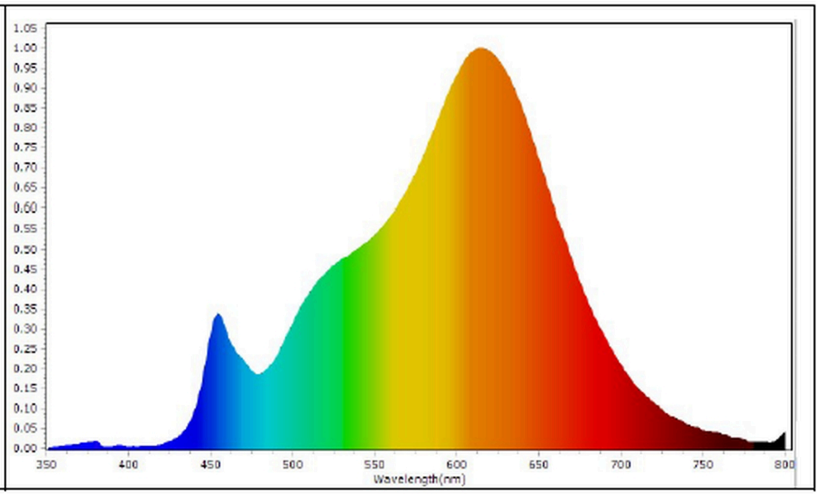
1.05
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
0.60
0.55
0.50
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
350
400
450
500
550
600
650
700
750
800
Wavelength(nm)

EPREL registration number: 2706330

Model placed on the Union market from 24/04/2026.

https://eprel.ec.europa.eu/qr/2706330

Voluntary parameters:

GTIN identifier: 7071033871045

Supplier: K ENG & CO AS (Importer)

Website: www.lampehuset.no

Customer care service:

Name: Customer support

Website: www.lampehuset.no

Email: nettbutikk@lampehuset.no

Phone: +4722324536

Address:
Vestvollveien 34b
2019 Skedsmokorset
Norway