

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LF023810301

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, light-	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,485 0,410
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	54	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	:		Date	:	2018-06-29 13:09:31
Specification	:	20180629 LF023810301	Sam. Status	:	
Sample No.	:	20180629 LF023810301 02	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:		Test by	:	
			Assessor	:	damin

### Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	52984 (81%)
Test Mode	:	Fast Test	T	:	63 ms
			Sensitivity	:	High

### Spectrum

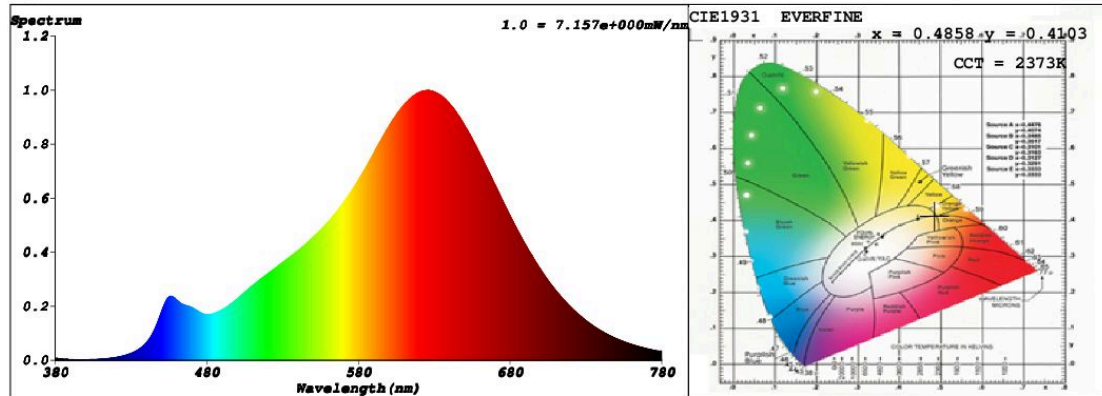

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4858$   $y = 0.4103$  /  $u' = 0.2795$   $v' = 0.5312$  ( $duv = -1.46e-03$ )

CCT= 2373K Prcp WL:  $L_d = 586.5nm$  Purity=69.0%

Peak WL:  $L_p = 625nm$  FWHM: =125.5nm Ratio:R=29.6% G=68.2% B=2.2%

Render Index:  $R_a = 91.4$

R1 =93 R2 =99 R3 =96 R4 =91 R5 =93 R6 =97 R7 =87

R8 =76 R9 =54 R10=96 R11=93 R12=89 R13=94 R14=99 R15=87

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 289.88 lm Eff. : 77.22 lm/W  $F_e = 1.0684$  W


### Electrical parameters

V = 230.1 V I = 0.02076 A P = 3.754 W PF = 0.7857

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)

Model placed on the Union market from 05/03/2021



**EPREL registration number:** 545618

<https://eprel.ec.europa.eu/qr/545618>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands