Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Filed

Supplier's address: Customer Service, Viale Milanofiori, Strada 1, Palazzo F1 snc, 20057 Milano Assago MI, IT

Model identifier: K144DCCL3

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	E
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	440 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	3,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions — Height	75	Spectral power distribution in the	See image in last page

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Width	35	range 250 nm to 800 nm, at full-load	
	Depth	35		
Claim of equivalent power[(a)]		Yes	If yes, equivalent power (W)	40
			Chromaticity coordinates (x and y)	0,465 0,415
Parameters for LED and OLED light sources:				
R9 colour rendering index value		0	Survival factor	1,00
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

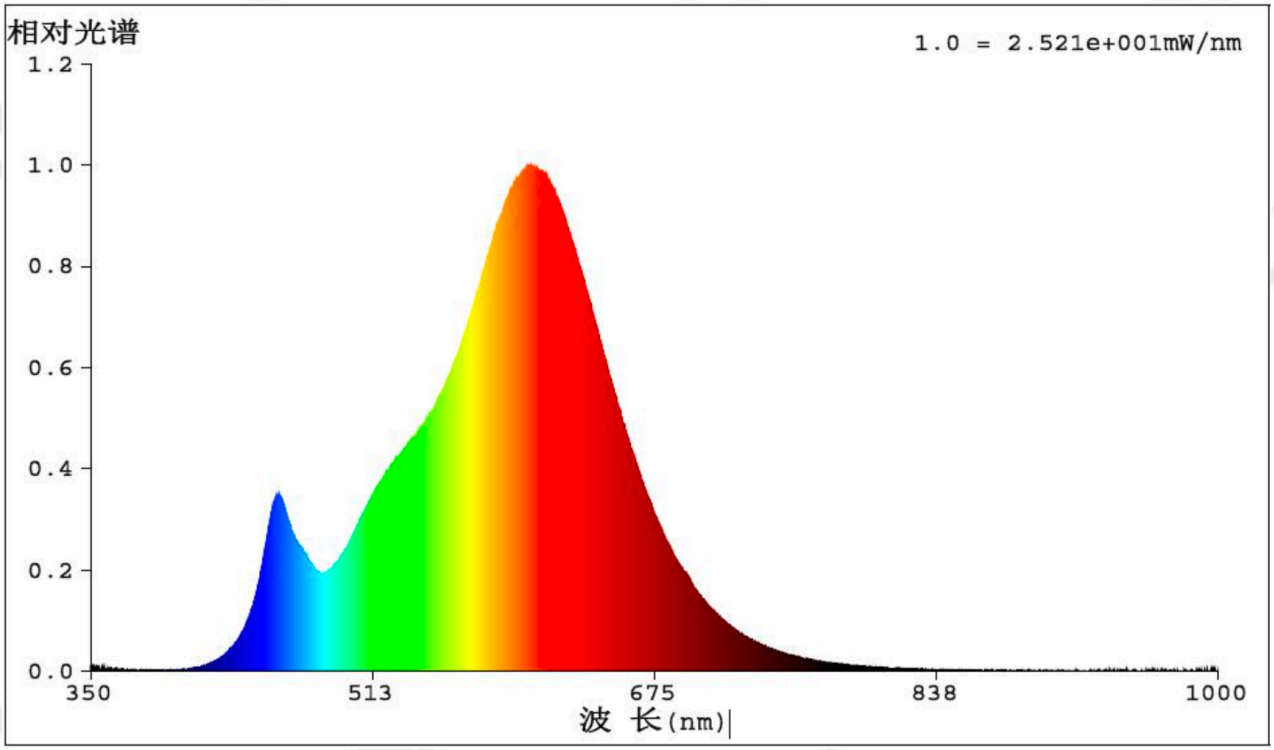
相对光谱
1.0 = 2.521e+001mW/nm
1.2
1.0
0.8
0.6
0.4
0.2
0.0
350
513
675
838
1000
波 长(nm)

EPREL registration number: 755132 Model placed on the Union market from 01/09/2021.	https://eprel.ec.europa.eu/qr/755132

Supplier: Filed Srl (Importer) **Website:** www.ledbyled.com

Customer care service:

Name: Customer Service **Website:** www.ledbyled.com

Email: ufficio@ledbyled.com **Phone:** +390236767640

Address:
Viale Milanofiori, Strada 1, Palazzo F1 snc
20057 Assago
Italy