

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023810305-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,516 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	81	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample :	LF023810305-1	Date :	2020-01-02 15:52:54
Specification :	LF023810305-1	Sam. Status :	
Sample No. :	LF023810305-1	Instrument :	HaasSuite(EVERFINE)
Manufacturer :		Test by :	Schiefer
		Assessor :	damin

Test Condition

Temperature :	25.3Deg	RH :	65.0%
WL Range :	380nm-780nm	IP :	49403 (75%)
Test Mode :	Fast Test	T :	60 ms
		Sensitivity :	High

Spectrum

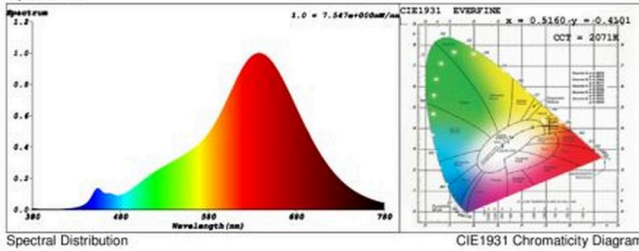

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5160$ $y = 0.4101$ / $u' = 0.2996$ $v' = 0.5357$ ($duv = -1.38e-03$)
 CCT= 2071K Prcp WL: Ld=588.7nm Purity=78.0%
 Peak WL: Lp=638nm FWHM: =111.3nm Ratio:R=34.5% G=63.8% B=1.7%

Render Index: Ra = 95.7

R1 =99 R2 =98 R3 =99 R4 =98 R5 =97 R6 =92 R7 =93
 R8 =90 R9 =81 R10=97 R11=92 R12=87 R13=98 R14=98 R15=96
 LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters


Flux = 242.78 lm Eff. : 61.89 lm/W $F_e = 1.0400$ W

Electrical parameters

V = 229.8 V I = 0.02169 A P = 3.923 W PF = 0.7870

Schiefer Professional Lighting
www.spl-lighting.com

Model placed on the Union market from 31/05/2021



EPREL registration number: 765788

<https://eprel.ec.europa.eu/qr/765788>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands