Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L152810930

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba15d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	850 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height: 113	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width: 29		
	Depth: 29		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,442 0,406
Parameters for LED and OLED light sources:				
R9 colour rendering index value		65	Survival factor	0,90
the lumen maintenance factor		0,93		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,2	Stroboscopic effect metric (SVM)	0,1

[a] '-' : not applicable;

[b] '-' : not applicable;

EVERFINE

SPL Spectrum Test Report

Sample	:	Date	: 2021-03-17 14:07:24
Specification	: L152810930	Sam. Status	:
Sample No.	: L152810930 02	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temprature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 55703 (85%)
Test Mode	: Fast Test	T	: 29 ms
		Sensitivity	: High

Spectrum

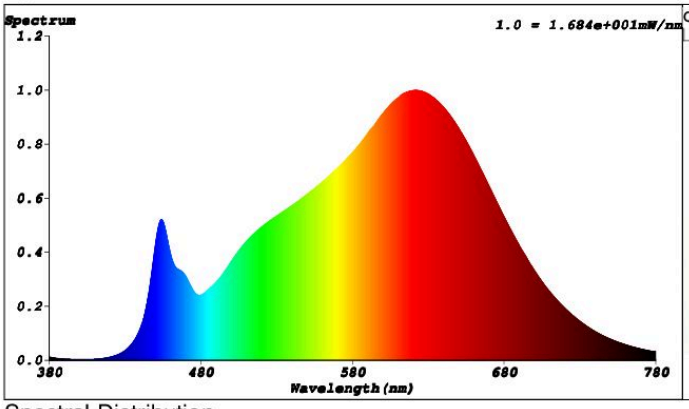

Spectral Distribution

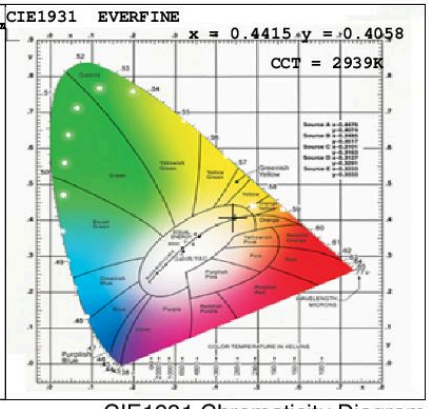

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: x = 0.4415 y = 0.4058 / u' = 0.2527 v' = 0.5228 (duv=9.41e-05)

CCT= 2939K Prcp WL: Ld=583.0nm Purity=54.3%

Peak WL: Lp=622nm FWHM: =161.5nm Ratio:R=24.9% G=72.2% B=3.0%

Render Index: Ra = 94.2

R1 =95 R2 =98 R3 =99 R4 =94 R5 =94 R6 =97 R7 =92

R8 =84 R9 =65 R10=95 R11=96 R12=82 R13=96 R14=99 R15=91

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 823.22 lm Eff. : 103.20 lm/W Fe = 2.8854 W

Electrical parameters

V = 229.9 V I = 0.03626 A P = 7.977 W PF = 0.9568

Schiefer Professional Lighting

www.spl-lighting.com

EPREL registration number: 831336 Model placed on the Union market from 01/09/2021.	https://eprel.ec.europa.eu/qr/831336

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer) **Website:** www.schiefer.nl

Customer care service:

Name: Schiefer Lighting **Website:** www.schiefer.nl

Email: info@schiefer.nl **Phone:** +31765037717

Address:
Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands