

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L642735827

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	78	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,470 0,263
Parameters for directional light sources:			
Peak luminous intensity (cd)	740	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	3	Survival factor	0,70
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-06-30 13:20:29
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Renee
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	50568 (77%)
Test Mode	:	Fast Test	T	:	53 ms
			Sensitivity	:	High

Spectrum

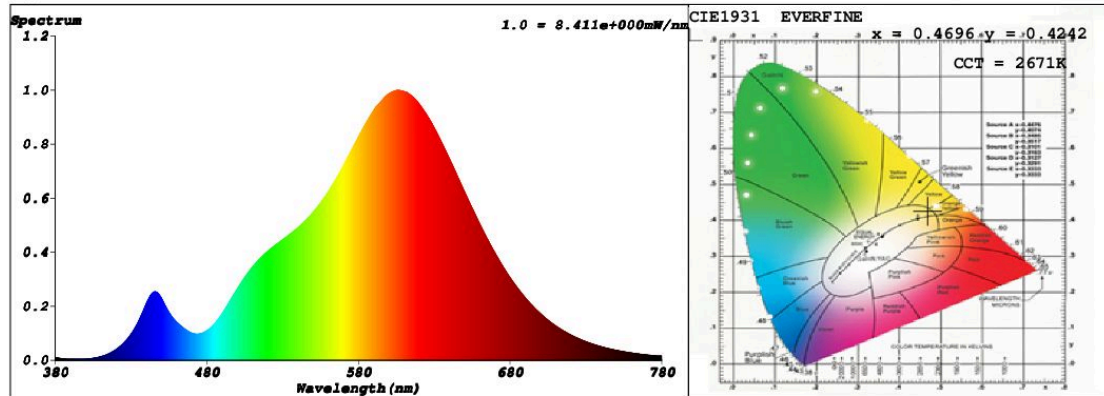

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4696$ $y = 0.4242$ / $u' = 0.2627$ $v' = 0.5339$ ($duv=4.13e-03$)

CCT= 2671K Prcp WL: Ld=583.1nm Purity=68.3%

Peak WL: Lp=607nm FWHM: =118.8nm Ratio:R=24.9% G=73.3% B=1.7%

Render Index: Ra = 81.4

R1 =79 R2 =88 R3 =98 R4 =80 R5 =79 R6 =87 R7 =84

R8 =57 R9 =3 R10=75 R11=80 R12=71 R13=81 R14=99 R15=70

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 386.07 lm Eff. : 76.10 lm/W Fe = 1.1741 W


Electrical parameters

V = 229.9 V I = 0.02676 A P = 5.073 W PF = 0.8247

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831579

<https://eprel.ec.europa.eu/qr/831579>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands