## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

<b>Supplier's name or trade mark:</b> LUMINE	S Lighting
--	------------

Supplier's address: LED Labs Sp. z o.o., ul. Zakopiańska 2C, 30-418 Kraków Polska


Model identifier: LUM-DILEDAS-120-4K

_	•			
Typa	Λt	liaht	sourc	Δ.
IVDE	OI.	IIGIIL	<b>3</b> Uui C	c.

Type of light so	uice.			
Lighting techno	logy used:	LED	Non-directional or directional:	DLS
Light source cap	o-type	terminal block		
(or other electri	ic interface)			
Mains or non-m	Mains or non-mains:		Connected light source (CLS):	No
Colour-tuneable	e light source:	No	Envelope:	-
High luminance	light source:	No		
Anti-glare shield	d:	No	Dimmable:	No
		Product para	meters	1
Parameter		Value	Parameter	Value
		General product p	parameters:	
٠,	nption in on- 00 h), rounded st integer	26	Energy efficiency class	F
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 980 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 900
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	26,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	83
Outer dimen-	Height	1 213	Spectral power dis-	See image
sions without	Width	26	tribution in the	in last page
separate con- trol gear, light- ing control		27	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,386 0,382		
Parameters for directional light sources:					
Peak luminous intensity (cd)	501	Beam angle in degrees, or the range of beam angles that can be set	94		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	11	Survival factor	1,00		
the lumen maintenance factor	0,96				

(a)'-': not applicable; (b)'-': not applicable;

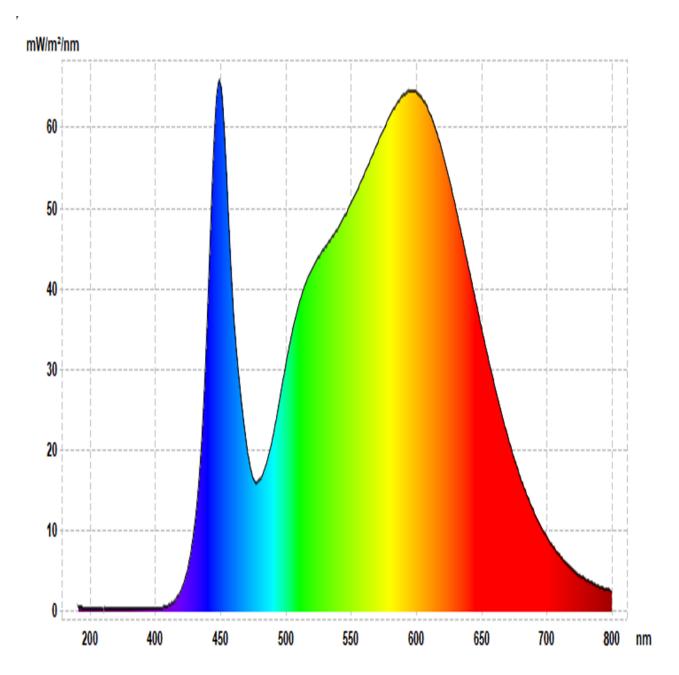

Model placed on the Union market from 02/11/2021



**EPREL registration number:** 910872 https://eprel.ec.europa.eu/qr/910872

**Supplier:** LED Labs S.A. (Manufacturer) **Website:** 

**Customer care service:** 

Name: LED Labs Sp. z o.o. Website: https://led-labs.pl/

Email: a.jaworski@led-labs.pl Phone: 733 377 705

Address:

ul. Zakopiańska 2C, 30-418 Kraków

Polska