

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: serien.lighting

Supplier's address: Entwicklung, Hainhäuser Straße 3-7, 63110 Rodgau, DE

Model identifier: P-6412 (REFLEX² Ceiling M 2700K CRI>90)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 425 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	12,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	8	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	260	
	Depth	6	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	50	Survival factor	-
the lumen maintenance factor	-		

(a) '-': not applicable;

(b) '-': not applicable;

Spectral Power Distribution Characteristics


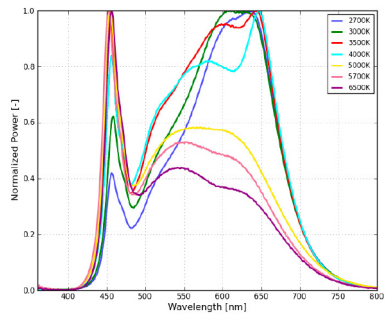


Figure 1c. Typical normalized power vs. wavelength for L130-xx90003000x21 at 120mA, T_j=25°C.

EPREL registration number: 972690

Model placed on the Union market from 01/09/2021.



<https://eprel.ec.europa.eu/qr/972690>

Supplier: Serien Raumleuchten GmbH (Manufacturer)

Website: <http://www.serien.com>

Customer care service:

Name: Entwicklung

Website:

Email: serien@serien.com

Phone: +49 (6106) 6909 0

Address:

Hainhäuser Straße 3-7
63110 Rodgau
Germany