Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LIGHT-POINT

Supplier's address: LIGHT-POINT, Grønnegade 3, 2. tv., 1107 Copenhagen K, DK

Model identifier: 261042 BOX MINI

Type of light source:


Lighting technology used:LEDNon-directional or directional:DLSLight source cap-typeLED Module(or other electric interface)MLSConnected light source (CLS):Yes				
(or other electric interface)MLSConnected light source (CLS):Yes	Lighting technology used:	LED		DLS
Mains or non-mains: MLS Connected light source (CLS): Yes	Light source cap-type	LED Module		
source (CLS):	(or other electric interface)			
	Mains or non-mains:	MLS	Ŭ	Yes
Colour-tuneable light source: No Envelope: -	Colour-tuneable light source:	No	Envelope:	-
High luminance light source: No	High luminance light source:	No		
Anti-glare shield:NoDimmable:Yes	Anti-glare shield:	No	Dimmable:	Yes

Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
•.	nption in on- 00 h), rounded st integer	4	Energy efficiency class	F		
dicating if it refe a sphere (360°)	s flux (фuse), in- ers to the flux in , in a wide cone nrow cone (90º)	360 in Nar- row cone (90°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000		
On-mode pow pressed in W	ver (P _{on}), ex-	4,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
(P _{net}) for CLS, e	andby power expressed in W the second dec-	0,00	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	Height	75	Spectral power dis-	See image		
sions without	Width	75	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	75	range 250 nm to 800 nm, at full-load	Page 1 /		

parts and non- lighting con- trol parts, if any (millime- tre)							
Claim of equivalent power ^(a)	-	lf yes, equivalent power (W)	-				
		Chromaticity coordi- nates (x and y)	0,434 0,403				
Parameters for directional light sources:							
Peak luminous intensity (cd)	130	Beam angle in de- grees, or the range of beam angles that can be set	40				
Parameters for LED and OLED light sources:							
R9 colour rendering index value	55	Survival factor	0,90				
the lumen maintenance factor	-						
Parameters for LED and OLED mains light sources:							
displacement factor (cos φ1)	0,00	Colour consistency in McAdam ellipses	3				
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-				
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3				

(a)'-' : not applicable;

(b)'-' : not applicable;

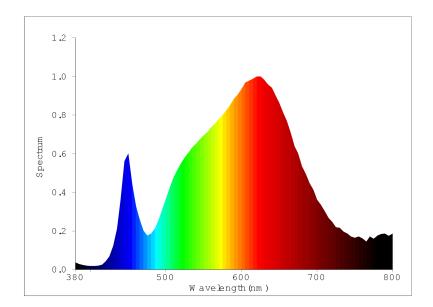

Model placed on the Union market from 01/01/2016



EPREL registration number: 1083836

Supplier: LIGHT-POINT A/S (Manufacturer)

Customer care service:

Name: LIGHT-POINT

Email: finance@light-point.com

Address:

Grønnegade 3, 2. tv. 1107 Copenhagen K Denmark https://eprel.ec.europa.eu/qr/10 83836

Website:

Website:

Phone: +4570255525