Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LIGHT-POINT
Supplier's address: LIGHT-POINT, Grønnegade 3, 2. tv., 1107 Copenhagen K, DK

Supplier's addr	ess: LIGHT-POIN	Γ, Grønnegade 3, 2.	tv., 1107 Copenhagen K,	, DK
Model identifie	r: 270004 COMP	ACT W1		
Type of light so	urce:			
Lighting technology used:		LED	Non-directional or directional:	DLS
Light source cap-type		LED		
(or other electric interface)				
Mains or non-mains:		MLS	Connected light source (CLS):	No
Colour-tuneable light source:		Yes	Envelope:	-
High luminance light source:		No		
Anti-glare shield:		No	Dimmable:	Yes
		Product para	meters	
Parameter		Value	Parameter	Value
		General product p	arameters:	
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		7	Energy efficiency class	F
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		540 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	27003000
On-mode power (P _{on}), expressed in W		6,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90
Outer dimen-	Height	150	Spectral power dis-	See image
sions without	Width	150	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	45	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordinates (x and y)	0,434 0,403			
Parameters for directional light sources:						
Peak luminous intensity (cd)	130	Beam angle in degrees, or the range of beam angles that can be set	40			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	55	Survival factor	0,90			
the lumen maintenance factor	-					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,00	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3			

(a)_{'-'} : not applicable;

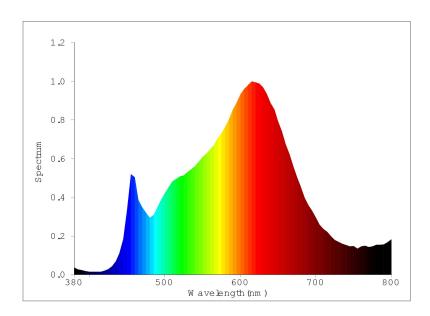

Model placed on the Union market from 07/10/2021



EPREL registration number: 1083916 https://eprel.ec.europa.eu/qr/10

83916

Supplier: LIGHT-POINT A/S (Manufacturer) **Website:**

Customer care service:

Name: LIGHT-POINT Website:

Email: finance@light-point.com Phone: +4570255525

Address:

Grønnegade 3, 2. tv. 1107 Copenhagen K

Denmark