

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Northern

Supplier's address: Northern, Bygdøy allé 68, 0265 oslo oslo oslo, NO

Model identifier: ME dim floor

Type of light source:

| | | | |
|---|---------------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | AC LED MODULE | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | Yes | Dimmable: | Yes |

Product parameters


| Parameter | Value | Parameter | Value |
|--|---------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 13 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 228 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 899 |
| On-mode power (P_{on}), expressed in W | 1,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,10 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 82 |
| Outer dimensions without separate control gear, lighting control | Height | 8 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 85 | |
| | Depth | 85 | |
| | | | See image in last page |

| | | | |
|---|------|--|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,445 0,409 |
| Parameters for directional light sources: | | | |
| Peak luminous intensity (cd) | 600 | Beam angle in degrees, or the range of beam angles that can be set | 120 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 50 | Survival factor | 0,00 |
| the lumen maintenance factor | 0,00 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,00 | Colour consistency in McAdam ellipses | 0 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 0,0 | Stroboscopic effect metric (SVM) | 0,0 |

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

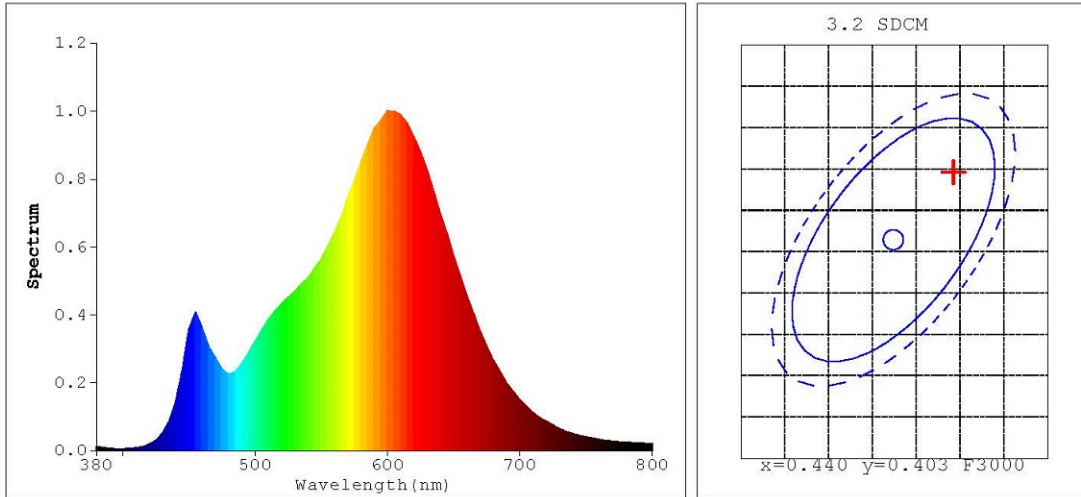

Color Parameters:

Chromaticity Coordinate: $x=0.4459$ $y=0.4096$
Chromaticity Coordinate: $u'=0.2539$ $v'=0.5249$ ($duv=1.02e-03$)
Tc=2899K Dominant WL:Ld=582.9nm Purity=56.8% Centroid WL:592.0nm
Ratio:R=25.4% G=72.1% B=2.4% Peak WL:Lp=600.0nm HWL:118.3nm
Render Index:Ra=82.5
R1 =81 R2 =93 R3 =94 R4 =80 R5 =82 R6 =92 R7 =81
R8 =57 R9 =5 R10=84 R11=80 R12=75 R13=84 R14=97 R15=73

Photo Parameters:

Flux: 1228.7 lm Fe: 3.7555 W Efficacy:92.69 lm/W

Electrical Parameters:

Lamp : U=231.5V I=0.06477A P=13.26W PF=0.8839

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
REF=50922 (R=4) %=-0.312%

Ip=25627 (G=4,D=56)
PMT: 26.8 centigrade [25.4]