

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Westal

**Supplier's address:** Produkt, Fabriksvägen 5, 564 35 Bankeryd, SE

**Model identifier:** 7507934

## Type of light source:

|                                                     |                |                                 |      |
|-----------------------------------------------------|----------------|---------------------------------|------|
| Lighting technology used:                           | LED            | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | Terminal block |                                 |      |
| Mains or non-mains:                                 | NMLS           | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No             | Envelope:                       | -    |
| High luminance light source:                        | No             |                                 |      |
| Anti-glare shield:                                  | Yes            | Dimmable:                       | No   |

## Product parameters

| Parameter                                                                                                                                      | Value                  | Parameter                                                                                                                                                  | Value                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>General product parameters:</b>                                                                                                             |                        |                                                                                                                                                            |                                                                         |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 15                     | Energy efficiency class                                                                                                                                    | D                                                                       |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 2 240 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                                                                   |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 14,2                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,20                                                                    |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                                                                      |
| Outer dimensions without separate control gear, lighting control                                                                               | Height                 | 6                                                                                                                                                          | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|                                                                                                                                                | Width                  | 280                                                                                                                                                        |                                                                         |
|                                                                                                                                                | Depth                  | 280                                                                                                                                                        |                                                                         |
|                                                                                                                                                |                        |                                                                                                                                                            | See image in last page                                                  |


|                                                           |      |                                    |                |
|-----------------------------------------------------------|------|------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |                                    |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)       | -              |
|                                                           |      | Chromaticity coordinates (x and y) | 0,435<br>0,403 |
| <b>Parameters for LED and OLED light sources:</b>         |      |                                    |                |
| R9 colour rendering index value                           | 7    | Survival factor                    | 1,00           |
| the lumen maintenance factor                              | 0,96 |                                    |                |

(a) : not applicable;


(b) : not applicable;

Spectrum

1.0 = 4.650e+001mW/nm

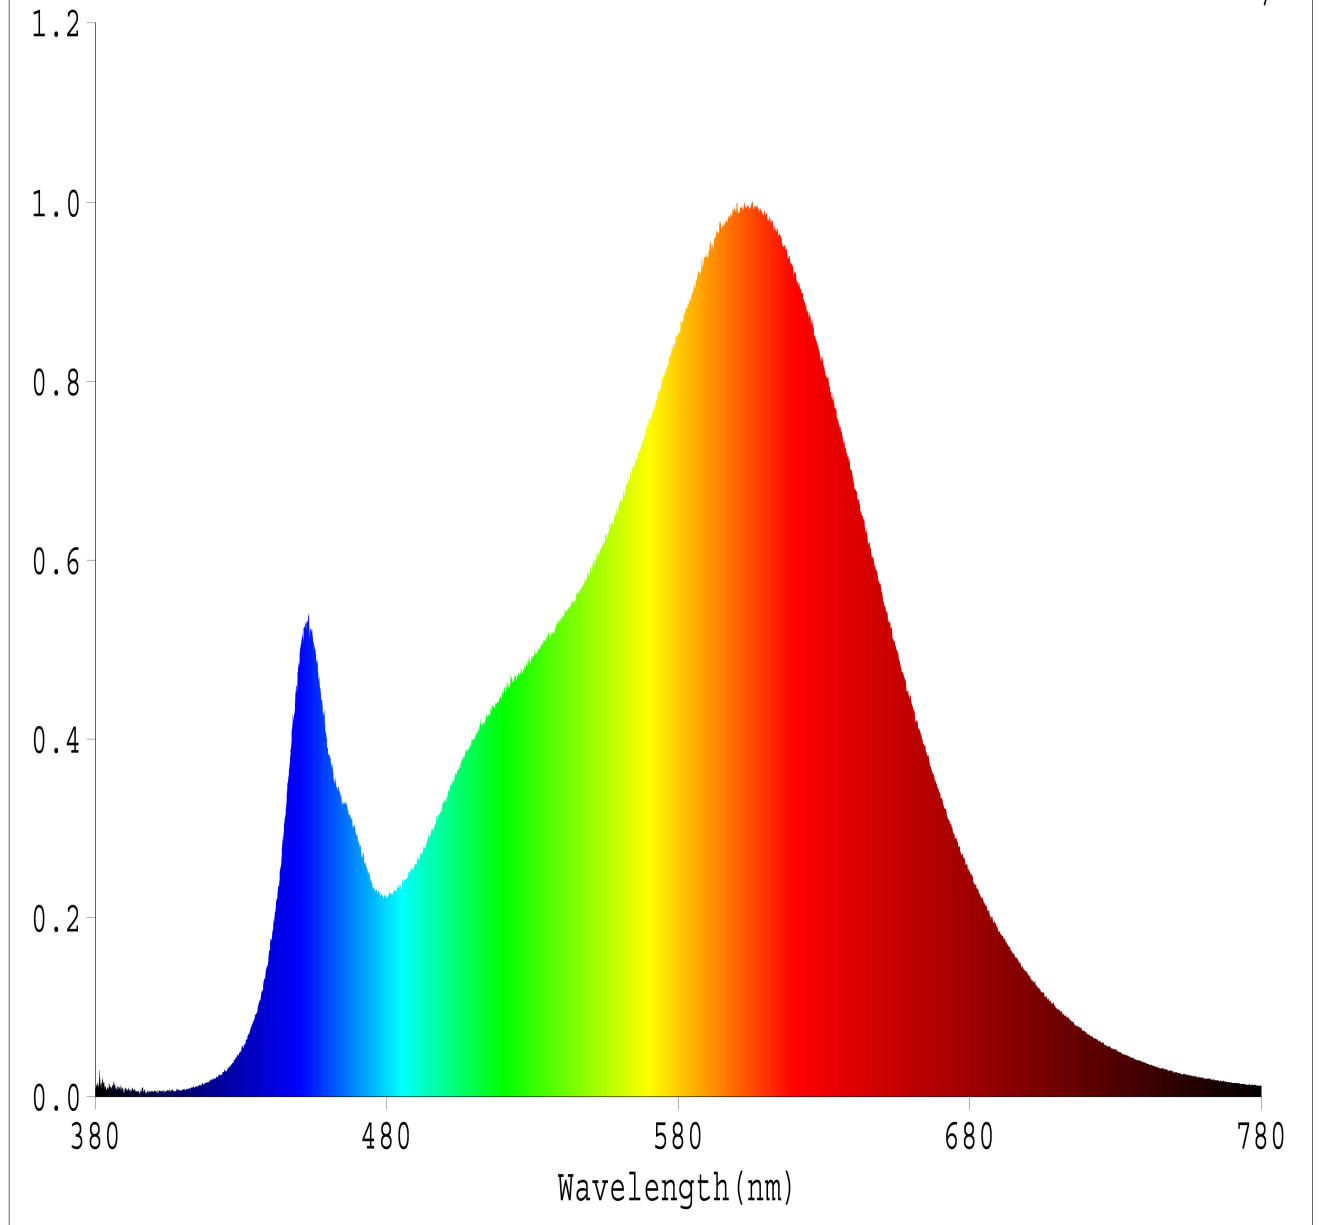

Model placed on the Union market from 23/12/2021



**EPREL registration number:** 1113061

<https://eprel.ec.europa.eu/qr/1113061>

**Supplier:** Westal AB (Importer)

**Website:**

**Customer care service:**

**Name:** Produkt

**Website:** <https://www.westal.se/>

**Email:** [timmy.kantola@westal.se](mailto:timmy.kantola@westal.se)

**Phone:** 0738-26 40 03

**Address:**

Fabriksvägen 5  
564 35 Bankeryd  
Sweden