Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: FIAI | | | | | |
|--|------------------------------|--|---------------------------------|--|--|
| | | | | | |
| Model identifier: 115506 | | | | | |
| Type of light source: | | | | | |
| Lighting technology used: | LED | Non-directional or directional: | DLS | | |
| Light source cap-type | keine | | | | |
| (or other electric interface) | | | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No | | |
| Colour-tuneable light source: | No | Envelope: | - | | |
| High luminance light source: | Yes | | | | |
| Anti-glare shield: | No | Dimmable: | Only with spe- cific dimmers | | |
| Product parameters | | | | | |
| Parameter | Value | Parameter | Value | | |
| General product parameters: | | | | | |
| Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer | 20 | Energy efficiency class | G | | |
| Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 009 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 29007950 | | |
| On-mode power (P _{on}), expressed in W | 19,5 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,10 | | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | | |
| Outer dimen- Height | 3 | Spectral power dis- | See image | | |
| sions without Width separate control gear, light- | 10 5 000 | tribution in the range 250 nm to 800 nm, at full-load | in last page | | |

| ing control parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|--|------|--|-------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordi- | 0,293 | | |
| | | nates (x and y) | 0,311 | | |
| Parameters for directional light sources: | | | | | |
| Peak luminous intensity (cd) | 321 | Beam angle in degrees, or the range of beam angles that can be set | 120 | | |
| Parameters for LED and OLED light sources: | | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,90 | | |
| the lumen maintenance factor | 0,70 | | | | |

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

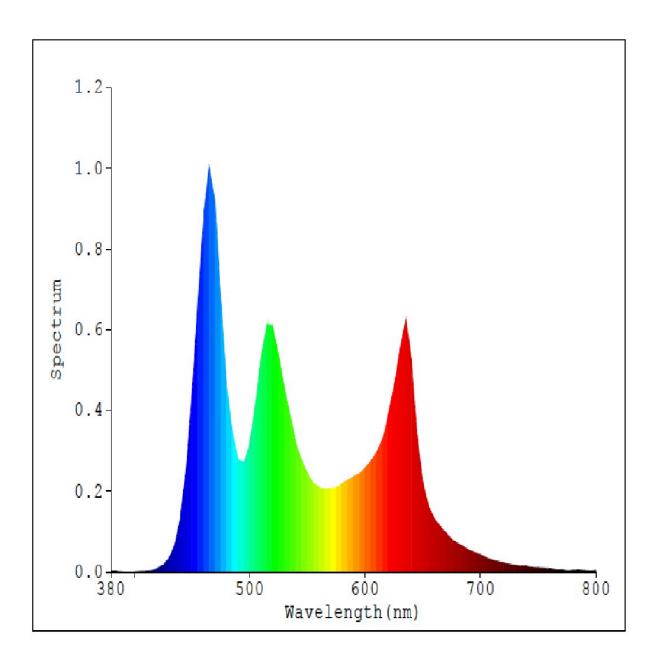

Model placed on the Union market from 16/12/2021



EPREL registration number: 1127747 https://eprel.ec.europa.eu/qr/11

27747

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

Customer care service:

Name: Vertrieb Website: https://isoled.shop

Email: office@isoled.at Phone: +43 5372 219999

Address: Egerbach 48 6334 Schwoich

Austria