

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: IP44.de

Supplier's address: Verwaltung, Mühlenstraße 20, 33378 Rheda-Wiedenbrück, DE

Model identifier: pip anthracite

Type of light source:

| | | | |
|---|--|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | non replaceable luminescence light sources | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | Yes | Dimmable: | Yes |


Product parameters

| Parameter | Value | Parameter | Value |
|--|--------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 6 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 320 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 |
| On-mode power (P_{on}), expressed in W | 6,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,30 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 83 |
| Outer dimensions without separate control gear, light- | Height | 46 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 140 | |
| | Depth | 153 | |
| | | | See image in last page |


| | | | |
|---|-------------------|--|----------------|
| ing control parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,434 0,403 |
| Parameters for directional light sources: | | | |
| Peak luminous intensity (cd) | 174 | Beam angle in degrees, or the range of beam angles that can be set | 89 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 10 | Survival factor | 0,10 |
| the lumen maintenance factor | 0,99 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,97 | Colour consistency in McAdam ellipses | 3 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | .. ^(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 0,0 | Stroboscopic effect metric (SVM) | 0,0 |

(a)'.': not applicable;

(b)'.': not applicable;

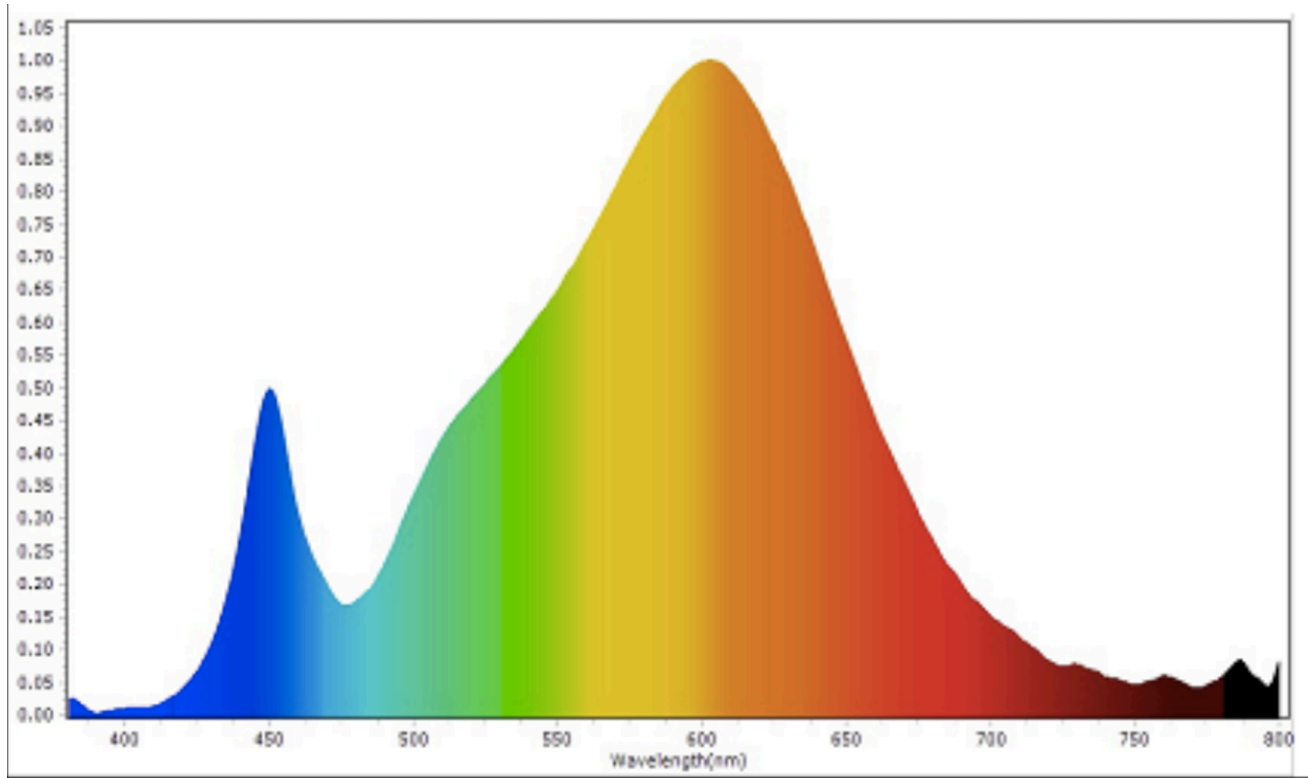

Model placed on the Union market from 01/04/2016



EPREL registration number: 1162732

<https://eprel.ec.europa.eu/qr/1162732>

Supplier: IP44 Schmalhorst GmbH & Co. KG (Manufacturer)

Website: www.IP44.de

Customer care service:

Name: Verwaltung

Website: www.IP44.de

Email: welcome@IP44.de

Phone: +49 5242 57970

Address:

Mühlenstraße 20
33378 Rheda-Wiedenbrück
Germany