

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** FIAI

**Supplier's address:** Vertrieb, Egerbach 48, 6334 Schwoich, AT

**Model identifier:** 115785

## Type of light source:

|   |      |                                 |     |
|---|------|---------------------------------|-----|
| Lighting technology used:                           | LED  | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | WIRE |                                 |     |
| Mains or non-mains:                                 | NMLS | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No   | Envelope:                       | -   |
| High luminance light source:                        | No   |                                 |     |
| Anti-glare shield:                                  | No   | Dimmable:                       | No  |


## Product parameters

| Parameter  | Value                   | Parameter  | Value   |
|--|-------------------------|--|---|
| <b>General product parameters:</b>   |                         |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 7                       | Energy efficiency class  | E   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 700 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500   |
| On-mode power ( $P_{on}$ ), expressed in W   | 6,6                     | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                       | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 90  |
| Outer dimensions without separate control gear, lighting control   | Height                  | 2  | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                   | 5  |   |
|  | Depth                   | 2  |   |
|  |                         |  | See image in last page  |


|   |      |  |                |
|---|------|--|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |  |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)                                       | -              |
|   |      | Chromaticity coordinates (x and y)                                 | 0,315<br>0,336 |
| <b>Parameters for directional light sources:</b>          |      |  |                |
| Peak luminous intensity (cd)                              | 700  | Beam angle in degrees, or the range of beam angles that can be set | 120            |
| <b>Parameters for LED and OLED light sources:</b>         |      |  |                |
| R9 colour rendering index value                           | 0    | Survival factor  | 0,90           |
| the lumen maintenance factor                              | 0,70 |  |                |

(a) : not applicable;

(b) : not applicable;

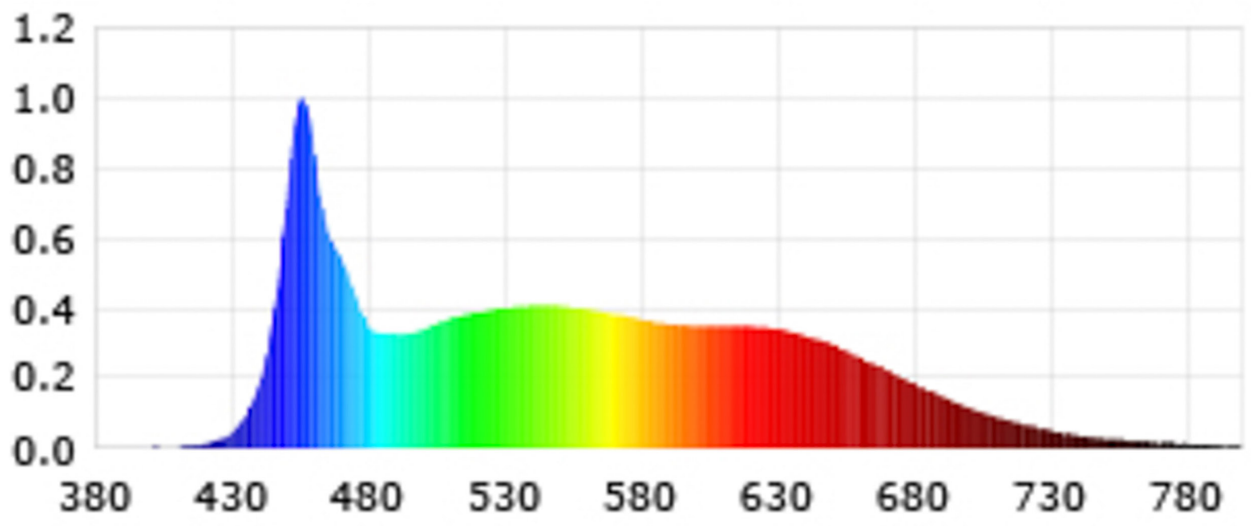

Model placed on the Union market from 01/06/2022



**EPREL registration number:** 1285907

<https://eprel.ec.europa.eu/qr/1285907>

**Supplier:** FIAI Handels GmbH (Manufacturer)

**Website:** [www.isoled.at](http://www.isoled.at)

**Customer care service:**

**Name:** Vertrieb

**Website:**

**Email:** [office@isoled.at](mailto:office@isoled.at)

**Phone:** +43 5372 219999

**Address:**

Egerbach 48, 6334 Schwoich, AT