## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	sources					
Supplier's name or trade mark: Northern						
Supplier's address: Northern, Bygdøy alle 68, 0265 OSLO, NO						
Model identifier: Salto Table						
Type of light so	urce:					
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type		glass				
(or other electric interface)						
Mains or non-mains:		MLS	Connected light source (CLS):	No		
Colour-tuneable	e light source:	No	Envelope:	-		
High luminance		No				
Anti-glare shield:		Yes	Dimmable:	Yes		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		6	Energy efficiency class	F		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		527 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 999		
On-mode power (P <sub>on</sub> ), expressed in W		5,8	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,10		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85		
Outer dimen-	Height	8	Spectral power dis-	See image		
sions without	Width	47	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	51	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordinates (x and y)	0,439 0,413			
Parameters for directional light sources:						
Peak luminous intensity (cd)	527	Beam angle in degrees, or the range of beam angles that can be set	180			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	85	Survival factor	0,88			
the lumen maintenance factor	0,92					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,80	Colour consistency in McAdam ellipses	6			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	-			

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

## HP8000 LED光电色测试报告

Product Mark

Product Type:高压灯板原样


Temperature :26'C

Operator :01

Manufacturer : Humidity :65%

Test Date :2021-09-02 08:35:43

Remark:

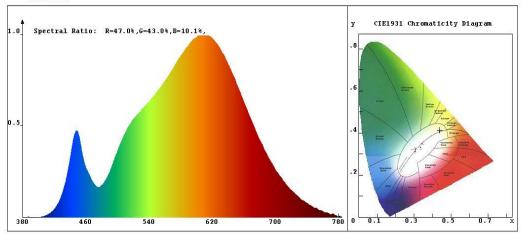

Chroma Parameters

Chro.Coor.:x=0.4392 y=0.4136 u=0.2479 v=0.3503 duv=0.0034

CCT: 3040K Dominant Wave.:581.5nm Purity:56.0%

Rendering Index:Ra= 85.3

R1 =84 R2 =89 R3 =95 R4 =87 R5 =85 R6 =87 R7 =87 R8 =69

R9 =29 R10=76 R11=87 R12=70 R13=84 R14=97 R15=78

Photo Parameters

Efficiency:0.136 Effi Level:A+ (EU 874-2012)

Ele. Parameters

Instrument state

Instrument: Hopoo HP8000S Integral Time: 95.614ms VPeak: 13096

VDark: 1301 Scan Range: 380-780nm Product ID: 201710386

Hopoo Optoelectronics Technology CO., LTD www.hopoo.net

Model placed on the Union market from 29/08/2022



**EPREL registration number:** 1292430 https://eprel.ec.europa.eu/qr/12

92430

Supplier: Northern.no AS (Manufacturer) Website: www.northern.no

**Customer care service:** 

Name: Northern Website: https://northern.no/no/

Email: post@northern.no Phone: +47 40 00 70 37

Address:

Bygdøy alle 68 0265 OSLO Norway