## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

## Model identifier: 115675


## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS		
Light source cap-type	WIRE				
(or other electric interface)					
Mains or non-mains:	NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	No		
Product parameters					

		Flouuct parai	lieters			
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/10 up to the neares	00 h), rounded	3	Energy efficiency class	G		
Useful luminous dicating if it refe a sphere (360°), (120°) or in a na	ers to the flux in , in a wide cone	60 in Narrow cone (90°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	2,6	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked st (P <sub>net</sub> ) for CLS, e and rounded to imal	•	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	100	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	60 100	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,430		
		nates (x and y)	0,396		
Parameters for directional light sources:					
Peak luminous intensity (cd)	60	Beam angle in de- grees, or the range of beam angles that can be set	60		
Parameters for LED and OLED lig	ht sources:				
R9 colour rendering index value	4	Survival factor	0,90		
the lumen maintenance factor	0,70				
(a)	L				

(a)<sub>'-'</sub> : not applicable; (b)<sub>'-'</sub> : not applicable;

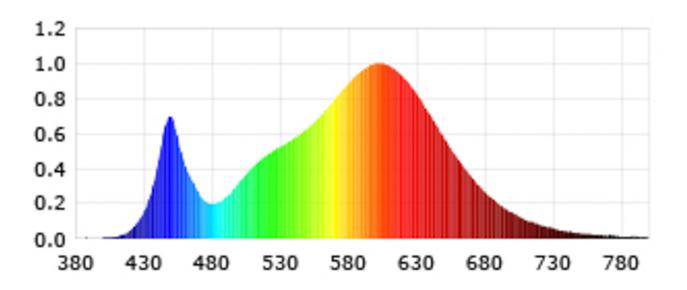

Model placed on the Union market from 13/05/2022



**EPREL registration number:** 1304342

Supplier: FIAI Handels GmbH (Manufacturer)

**Customer care service:** 

Name: Vertrieb

Email: office@isoled.at

Address: Egerbach 48 6334 Schwoich Austria https://eprel.ec.europa.eu/qr/13 04342

Website: www.isoled.at

Website: https://isoled.shop

Phone: +43 5372 219999