# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: Robus

Supplier's address: Reception, Nangor Road LED Group, D12E7VP Dublin 12 Dublin, IE

### Model identifier: RSB204012-LS

# Type of light source:


| Lighting technology used:     | LED   | Non-directional or directional: | NDLS |  |  |  |
|-------------------------------|-------|---------------------------------|------|--|--|--|
| Light source cap-type         | 270mA |                                 |      |  |  |  |
| (or other electric interface) |       |                                 |      |  |  |  |
| Mains or non-mains:           | NMLS  | Connected light source (CLS):   | No   |  |  |  |
| Colour-tuneable light source: | No    | Envelope:                       | -    |  |  |  |
| High luminance light source:  | No    |                                 |      |  |  |  |
| Anti-glare shield:            | No    | Dimmable:                       | No   |  |  |  |
| Product parameters            |       |                                 |      |  |  |  |

| Parameter  |  | Value                     | Parameter  | Value        |  |  |  |
|--|--|---------------------------|--|--------------|--|--|--|
| General product parameters:  |  |                           |  |              |  |  |  |
|  | nption in on-<br>00 h), rounded<br>st integer                                    | 19                        | Energy efficiency<br>class   | D            |  |  |  |
| dicating if it refo<br>a sphere (360º)                             | s flux (фuse), in-<br>ers to the flux in<br>, in a wide cone<br>arrow cone (90º) | 3 003 in<br>Sphere (360°) | Correlated colour<br>temperature,<br>rounded to the near-<br>est 100 K, or the<br>range of correlat-<br>ed colour temper-<br>atures, rounded to<br>the nearest 100 K,<br>that can be set | 4 000        |  |  |  |
| On-mode pov<br>pressed in W  | ver (P <sub>on</sub> ), ex-  | 19,0                      | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | _            |  |  |  |
| (P <sub>net</sub> ) for CLS,                                       | tandby power<br>expressed in W<br>the second dec-                                | -                         | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |  |  |  |
| Outer dimen-   | Height   | 1 140                     | Spectral power dis-  | See image    |  |  |  |
| sions without<br>separate con-<br>trol gear, light-<br>ing control | Width<br>Depth   | 19<br>2                   | tribution in the<br>range 250 nm to 800<br>nm, at full-load  | in last page |  |  |  |
|  |  |                           |  | Dago 1 / A   |  |  |  |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |      |                              |       |  |  |  |
|--|------|------------------------------|-------|--|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -    | If yes, equivalent power (W) | -     |  |  |  |
|  |      | Chromaticity coordi-         | 0,376 |  |  |  |
|  |      | nates (x and y)              | 0,377 |  |  |  |
| Parameters for LED and OLED light sources:                                 |      |                              |       |  |  |  |
| R9 colour rendering index value  | 0    | Survival factor              | 1,00  |  |  |  |
| the lumen maintenance factor   | 0,96 |                              |       |  |  |  |

(a)'-' : not applicable;

(b)<sub>'-'</sub> : not applicable;

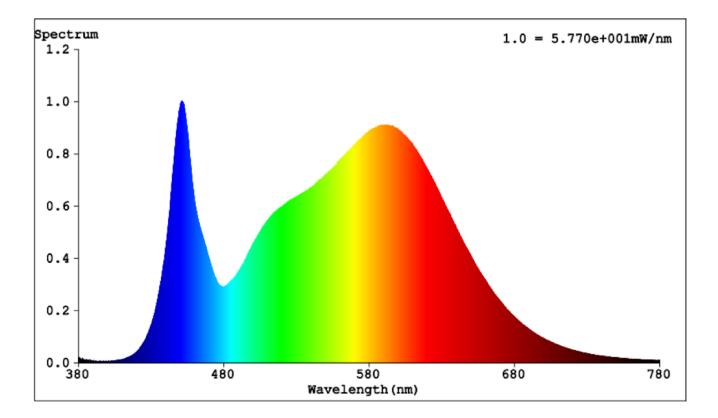

Model placed on the Union market from 12/03/2023



# **EPREL registration number:** 1374707

Supplier: LED Group (Manufacturer)

### **Customer care service:**

Name: Reception

Email: info@robus.com

## Address: Nangor Road LED Group D12E7VP Dublin 12 Ireland

https://eprel.ec.europa.eu/qr/13 74707

Website: https://robus.com/

## Website: www.robus.com

Phone: +35317099000