## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Lightnet GmbH

Supplier's address: Lightnet\_GmbH, Zollstockgürtel 65 50969 Köln Deutschland

Model identifier: CI6-LC4-830-Q400

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Soldering pad		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


**Product parameters** 

	Value	Doromotor	37.1			
	value	Parameter	Value			
General product parameters:						
00 h), rounded	8	Energy efficiency class	D			
ers to the flux in , in a wide cone	1 258 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000			
ver (P <sub>on</sub> ), ex-	8,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
expressed in W	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Height	7	Spectral power dis-	See image			
Width Depth	340 340	tribution in the range 250 nm to 800 nm, at full-load	in last page			
	andby power expressed in W the second dec- Height Width	nption in on- 00 h), rounded st integer s flux (duse), in- ers to the flux in , in a wide cone rrow cone (90°) ver (P <sub>on</sub> ), ex- andby power expressed in W the second dec- Height 7 Width 340	Imption in on- 00 h), rounded st integer8Energy efficiency class6 flux (фuse), in- ers to the flux in , in a wide cone rrow cone (90°)1 258 in Sphere (360°)Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the sect ond decimalver (Pon), ex- expressed in W the second dec-8,0Standby power (Psb), expressed in W and rounded to the sec- ond decimalandby power expressed in W the second decColour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be setHeight7Spectral power dis- tribution in the range 250 nm to 800			

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	_	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,433		
		nates (x and y)	0,402		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	0	Survival factor	1,00		
the lumen maintenance factor	0,96				

(a)'-' : not applicable;

(b)<sub>'-'</sub> : not applicable;

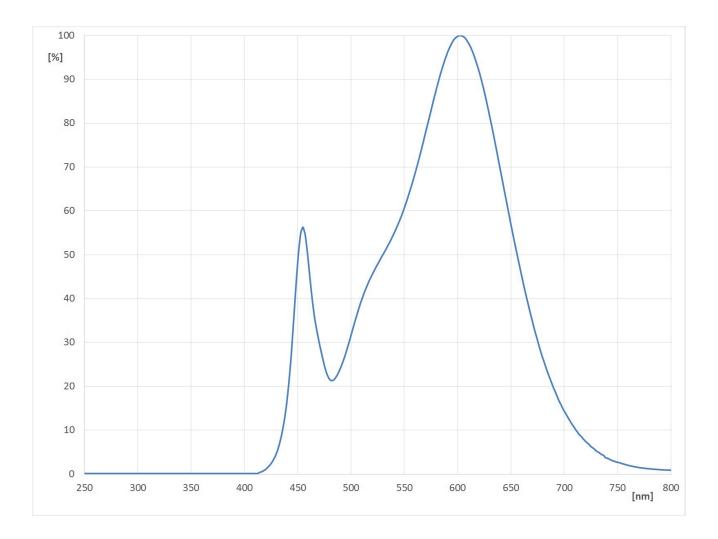

Model placed on the Union market from 26/08/2022



## **EPREL registration number:** 1376154

Supplier: Lightnet GmbH (Manufacturer)

**Customer care service:** 

Name: Lightnet\_GmbH

Email: info@lightnet.de

Address: Zollstockgürtel 65 50969 Köln Deutschland https://eprel.ec.europa.eu/qr/13 76154

Website: <a href="https://www.lightnet-group.com/">https://www.lightnet-group.com/</a>

Website: www.lightnet-group.com Phone: +49 (0) 2 21 22 25 26-0