Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Duralamp S.p.A.

Supplier's address: Customer Care, Via Pratese 164, 50145 Florence, Italy

Model identifier: 1D1902CH

Type of light source:


Lighting technology used:	HL	Non-directional or directional:	NDLS		
Light source cap-type	G9				
(or other electric interface)					
Mains or non-mains:	MLS	Connected light source (CLS):	No		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	Yes		
Product parameters					

(120°) or in a narrow cone (90°)est 100 range of ed colour atures, ro the neare that can bOn-mode power (Pon), ex- pressed in W28,0Standby p expressed rounded to ond decimeNetworked standby power (Pnet) for CLS, expressed in W-Colour reg dex, round nearest in the range ues that can b	Product parameters					
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer28Energy classUseful luminous flux (фuse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)370 in Sphere (360°)Correlated temperature rounded to est 100 range of ed colour atures, routher that can bOn-mode power (Pon), ex- pressed in W28,0Standby power (Pon), ex- ond decimeNetworked standby power (Pnet) for CLS, expressed in W-Colour ref dex, round nearest in the range ues that can	ter	Value				
mode(kWh/1000 h), rounded up to the nearest integerclassUseful luminous flux (фuse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)370 in Sphere (360°)Correlated temperature rounded to est 100 range of ed colour atures, rounded to the nearest that can bOn-mode power (Pon), ex- pressed in W28,0Standby p expressed rounded to the nearest that can bNetworked standby power (Pnet) for CLS, expressed in W-Colour ref dex, round earest in the range ues that can	General product parameters:					
dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) On-mode power (P _{on}), ex- pressed in W Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second dec- imal	efficiency	G				
pressed in W expressed rounded to ond decime (P _{net}) for CLS, expressed in W and rounded to the second dec- imal ues that car	ature, d to the near- 0 K, or the of correlat- our temper- rounded to arest 100 K,	3 000				
(P _{net}) for CLS, expressed in W and rounded to the second dec- imal ues that ca	y power (P _{sb}), sed in W and d to the sec- cimal	0,00				
Outer dimen- Height 43 Spectral r	rendering in- unded to the integer, or ge of CRI-val- t can be set	100				
	l power dis-	See image				
sions without Width 15 tribution		in last page				
	range 250 nm to 800 nm, at full-load					

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent powe	r ^(a) –	If yes, equivalent power (W)	-
		Chromaticity coordi- nates (x and y)	0,438 0,404

(a)'-' : not applicable;

(b)'-' : not applicable;

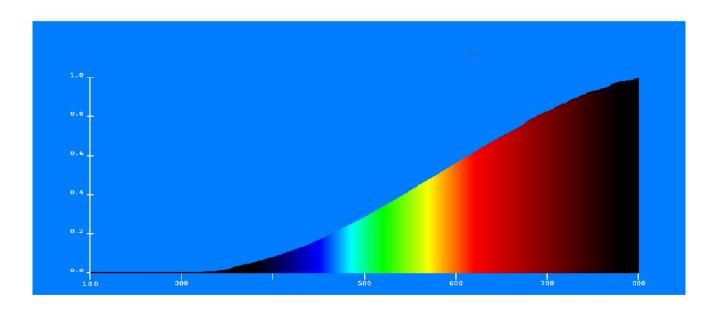

Model placed on the Union market from 01/09/2021



EPREL registration number: 1447815

Supplier: DURA LAMP SRL (Importer)

Customer care service:

Name: Customer Care

Email: duralamp@duralamp.it

Address:

Via Pratese 164, 50145 Florence, Italy

https://eprel.ec.europa.eu/qr/14 47815

Website: www.duralamp.com

Website: www.duralamp.com

Phone: +39055894881