## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

<b>Supplier's name or trade mark:</b> De	esign By Us
------------------------------------------	-------------

Supplier's address: Design By Us, Rentemestervej 43, 2400 Copenhagen NV, DK

Model identifier: Globe Bulb Ø80 - Crown Silver | 3,5W


_	•			
Type	Λt	light	COLL	rca.
IVDE	VI.	HEILL	SOU	LC.

Anti-giare sineia.	Draduct nor		162
Anti-glare shield:	Yes	Dimmable:	Yes
High luminance light source:	No		
Colour-tuneable light source:	No	Envelope:	-
Mains or non-mains:	MLS	Connected light source (CLS):	No
(or other electric interface)			
Light source cap-type	E27		
Lighting technology used:	LED	Non-directional or directional:	NDLS

Product parameters				
Parameter		Value	Parameter	Value
		General product p	parameters:	
<u> </u>	mption in on- 00 h), rounded st integer	4	Energy efficiency class	E
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode pov pressed in W	ver (P <sub>on</sub> ), ex-	3,6	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, (	tandby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90
Outer dimen-	Height	120	Spectral power dis-	See image
sions without	Width	80	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	80	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)				
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	35	
		Chromaticity coordi-	0,463	
		nates (x and y)	0,420	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9 0	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED r	mains light sources:			
displacement factor (cos φ1)	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	t	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	-	

(a)'-': not applicable; (b)'-': not applicable;

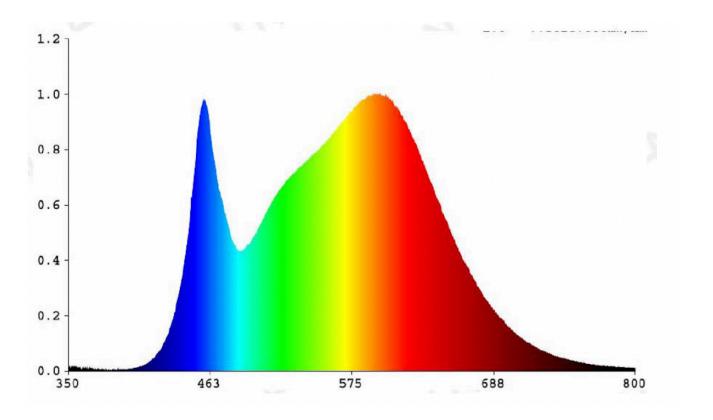

Model placed on the Union market from 01/03/2023



**EPREL registration number:** 1487255 https://eprel.ec.europa.eu/qr/14

87255

Supplier: Design By Us ApS (Importer) Website: design-by-us.com

**Customer care service:** 

Name: Design By Us Website: www.design-by-us.com

Email: mail@design-by-us.com Phone: +4538118086

Address:

Rentemestervej 43 2400 Copenhagen NV

Denmark