

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ANTIDARK

Supplier's address: Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

Model identifier: 2-260-51-

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	729 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	48	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	90	
	Depth	48	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,436 0,402
Parameters for directional light sources:			
Peak luminous intensity (cd)	921	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	78	Survival factor	1,00
the lumen maintenance factor	0,96		

(a): not applicable;

(b): not applicable;

2-260-51-1-3537

Product Mark

Product Type :2-260-51-1-3537

Manufacturer :BMMQ


Temperature :admin'C

Humidity :65%

Operator :admin

Test Date :2020-06-26 16:19:22

Remark:

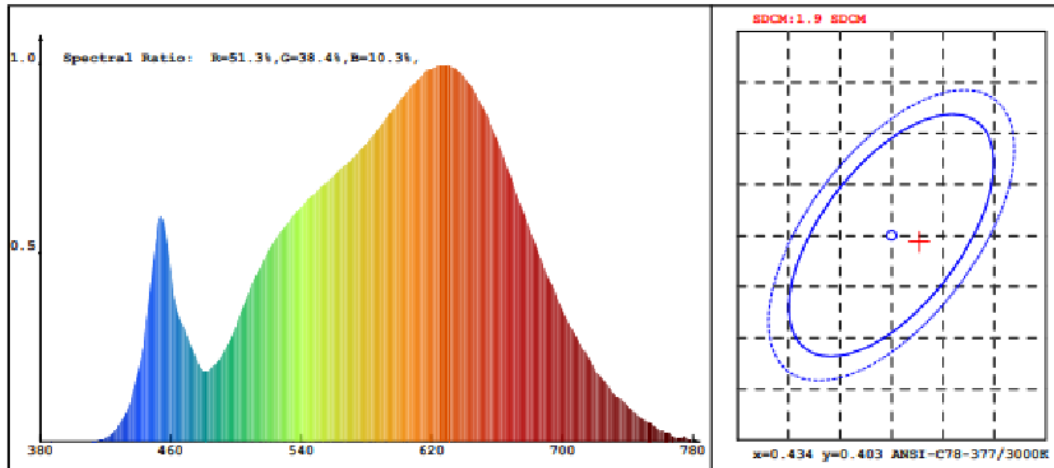

Chroma Parameters

Chro.Coor.:x=0.4365 y=0.4024 u=0.2510 v=0.3471 duv=-0.0006

CCT: 2993K Dominant Wave.:583.1nm Purity:51.8%

Flux RGB Ratio:R=24.2%,G=74.1%,B=1.7% Peak Wave:626.8nm Half Width:166.0nm

Rendering Index:Ra= 92.1

R1 =93	R2 =95	R3 =94	R4 =92	R5 =92	R6 =92	R7 =94	R8 =85
R9 =66	R10=85	R11=92	R12=74	R13=93	R14=96	R15=90	

Photo Parameters

Flux:738.86lm Effi.:81.2lm/W Radiant:2393.3mW Iv:0.0mcd

Ele. Parameters

Voltage:U=229.400V

Current:I=0.0410A

Power:P=9.10W

Power Factor:PF=0.952


Lamp Parameters

Voltage:U=27.881V

Current:I=0.0000A

Power:P=0.00W

Model placed on the Union market from 20/01/2020



EPREL registration number: 1517692

<https://eprel.ec.europa.eu/qr/1517692>

Supplier: Antidark Aps (Manufacturer)

Website: www.antidark.dk

Customer care service:

Name: Antidark Aps

Website:

Email: tj@scanstudio.dk

Phone: +4540187474

Address:

damgårdvej 2
5500 Middelfart
Denmark