

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** tp-link

**Supplier's address:** TP-Link Deutschland GmbH, Am Trippelsberg 100, 40589 Düsseldorf, DE

**Model identifier:** Tapo L535B

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	B22		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 055 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2500...6500
On-mode power ( $P_{on}$ ), expressed in W	8,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,40	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	115	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,459 0,411
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	15	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;


(b)-: not applicable;

**Test Data Sheet 8: Spectral power distribution**

**Model:** Tapo L535E

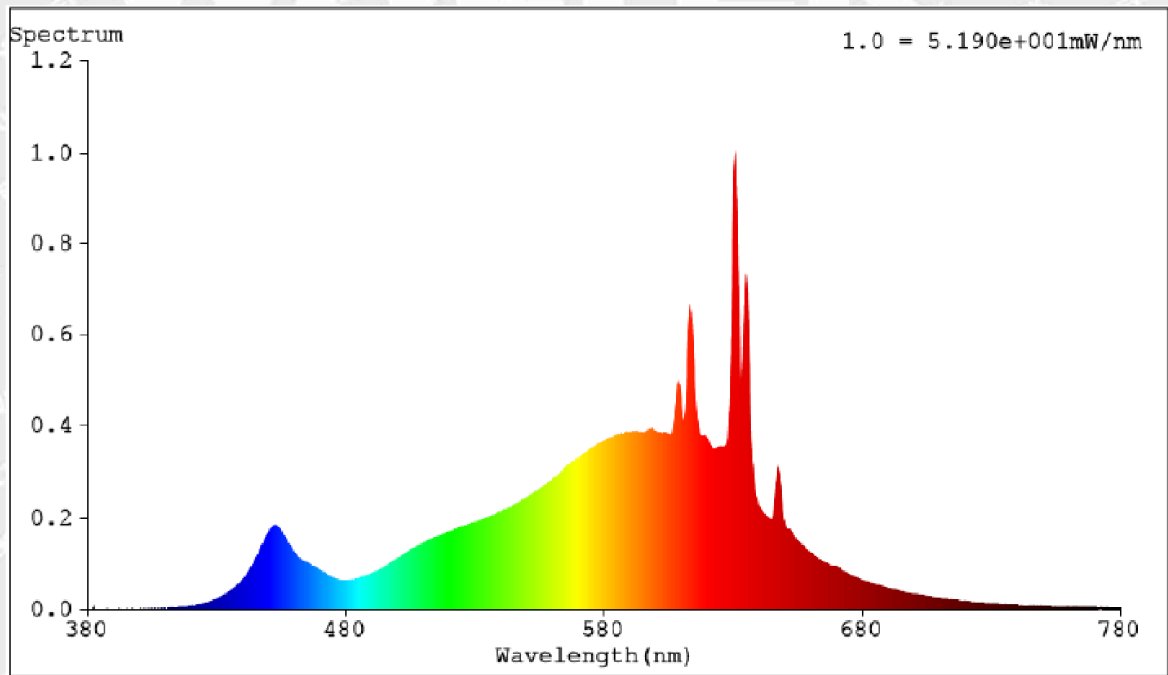

Model placed on the Union market from 20/09/2023



**EPREL registration number:** 1614566

<https://eprel.ec.europa.eu/qr/1614566>

**Supplier:** TP-Link Deutschland GmbH (Importer)

**Website:** <https://www.tp-link.com/de/>

**Customer care service:**

**Name:** TP-Link Deutschland GmbH

**Website:** [www.tp-link.com/de/](http://www.tp-link.com/de/)

**Email:** [product.de@tp-link.com](mailto:product.de@tp-link.com)

**Phone:** (+49) 0211 5447 4970

**Address:**

Am Trippelsberg 100  
40589 Düsseldorf  
Germany