

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ANTIDARK

**Supplier's address:** Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

**Model identifier:** 2-282-02

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	19	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 028 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800...3000
On-mode power ( $P_{on}$ ), expressed in W	18,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	105	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	210	
	Depth	100	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,426 0,391
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	166	Beam angle in degrees, or the range of beam angles that can be set	45
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	90	Survival factor	1,00
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

# Spectrum Test Report

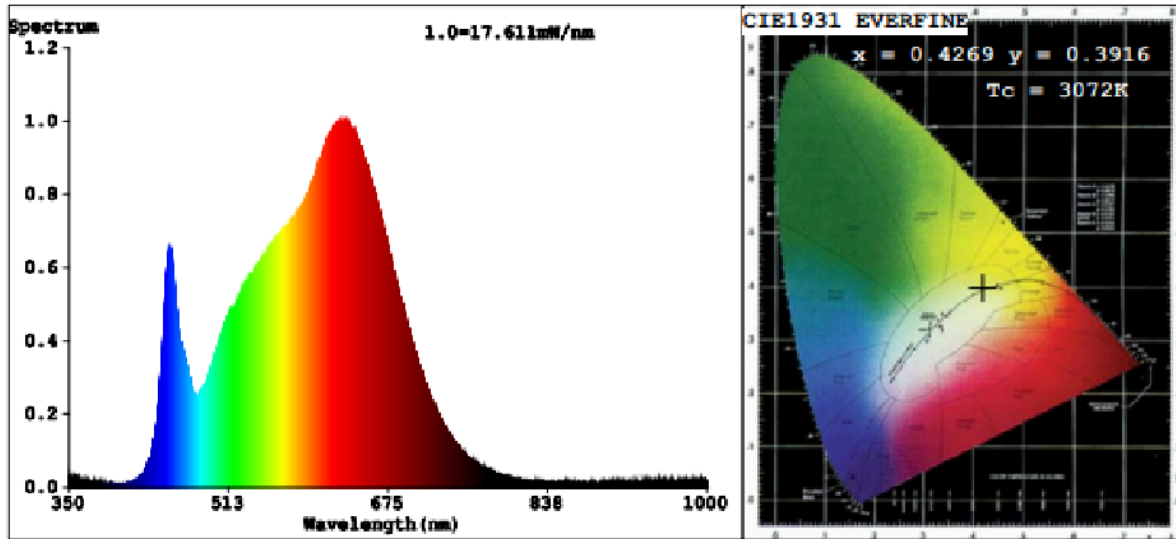

## Color Parameters:

Chromaticity Coordinate:  $x=0.4269$   $y=0.3916$   $u'=0.2495$   $v'=0.5149$

$T_c=3072K$  (Duv=-0.0036) Dominant WL:Ld =584.0nm Purity=45.7%

Red Ratio:R=26.1% Peak WL:Lp=631.5nm HWL:Lhd=167.2nm

Render Index:Ra=96.9

R1 =99 R2 =99 R3 =97 R4 =97 R5 =98 R6 =96 R7 =96

R8 =93 R9 =86 R10=97 R11=97 R12=83 R13=99 R14=98 R15=98

## Photo Parameters:

Flux = 849.5 lm Eff. : 44.48 lm/W Fe = 3.193 W

## Electrical parameters:

V = 221.3 V I = 0.08783 A P = 19.10 W PF = 0.9827

LEVEL:OUT WHITE:ANSI\_3000K


Status: Integral T = 52 ms Ip = 54704 (838)

---

Model:BALL S 2-DTW

Number:BALL S 2-DTW

Model placed on the Union market from 20/06/2023



**EPREL registration number:** 1627740

<https://eprel.ec.europa.eu/qr/1627740>

**Supplier:** Antidark Aps (Manufacturer)

**Website:** [www.antidark.dk](http://www.antidark.dk)

**Customer care service:**

**Name:** Antidark Aps

**Website:**

**Email:** [tj@scanstudio.dk](mailto:tj@scanstudio.dk)

**Phone:** +4540187474

**Address:**

damgårdvej 2  
5500 Middelfart  
Denmark