
Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

| sources | ELEGATED REGUL | .AHON (EU) 2019/2 | 015 with regard to ener | gy labelling of light | | |
|--|--------------------|---------------------------|--|---------------------------|--|--|
| Supplier's name or trade mark: LEDVANCE | | | | | | |
| Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany | | | | | | |
| Model identifie | r: AC33866 | | | | | |
| Type of light so | urce: | | | | | |
| Lighting technology used: | | LED | Non-directional or directional: | NDLS | | |
| Light source cap-type | | G13 | | | | |
| (or other electric interface) | | | | | | |
| Mains or non-mains: | | NMLS | Connected light source (CLS): | No | | |
| Colour-tuneable light source: | | No | Envelope: | - | | |
| High luminance light source: | | No | | | | |
| Anti-glare shield: | | No | Dimmable: | No | | |
| Product parameters | | | | | | |
| Parameter | | Value | Parameter | Value | | |
| _ | | General product p | | _ | | |
| Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer | | 26 | Energy efficiency class | D | | |
| Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | | 3 700 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500 | | |
| On-mode power (P _{on}), expressed in W | | 23,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 83 | | |
| Outer dimensions without separate control gear, lighting control | Height Width Depth | 1 513 27 27 | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | |
|--|------|------------------------------|-------|--|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | | |
| | | Chromaticity coordi- | 0,312 | | | |
| | | nates (x and y) | 0,328 | | | |
| Parameters for LED and OLED light sources: | | | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,90 | | | |
| the lumen maintenance factor | 0,70 | | | | | |

(a)'-': not applicable; (b)'-': not applicable;

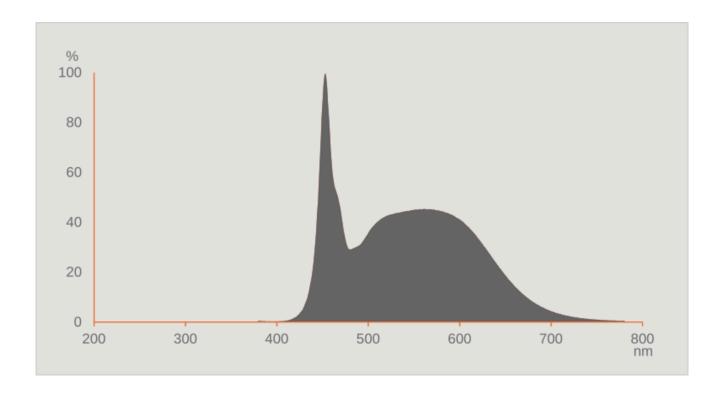

Model placed on the Union market from 07/09/2021



EPREL registration number: 519429 https://eprel.ec.europa.eu/qr/519429

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

Customer care service:

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany