## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SYLVANIA

Supplier's address: Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -

Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

Mode	l identifi	<b>er</b> : 00	)29192
------	------------	----------------	--------

т.,	nn	Λf	امزا	h+	50		co.
ıу	hΕ	UI	IIBI	IΙL	30	u	ce:


Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	GU10		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## **Product parameters**

	Product parameters						
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consur mode (kWh/10 up to the neare	00 h), rounded	13	Energy efficiency class	F			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 150 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000			
On-mode power (P <sub>on</sub> ), expressed in W		13,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimen-	Height	69	Spectral power dis-	See image			
sions without	Width	111	tribution in the	in last page			
separate con- trol gear, light-	Depth	111	range 250 nm to 800 nm, at full-load				

ing control parts and non-lighting control parts, if any (millime-			
tre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	140
		Chromaticity coordinates (x and y)	0,434 0,403
Parameters for directional light	sources:		
Peak luminous intensity (cd)	3 200	Beam angle in degrees, or the range of beam angles that can be set	25
Parameters for LED and OLED lig	ht sources:		
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,97		
Parameters for LED and OLED ma	ains light sources	:	
displacement factor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)'-': not applicable; (b)'-': not applicable;

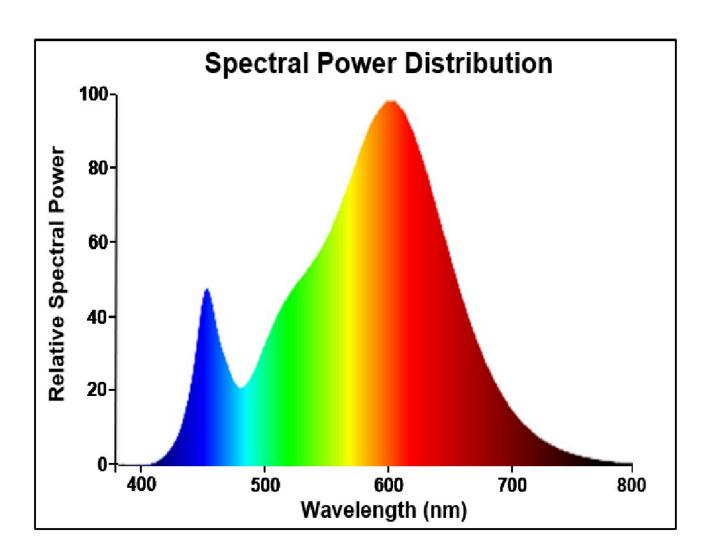

Model placed on the Union market from 14/07/2021



**EPREL registration number:** 543114 https://eprel.ec.europa.eu/qr/543114

Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com

turer)

**Customer care service:** 

Name: Product Compliance Website: www.sylvania-lighting.com

Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900

Address:

Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor,

Népfürdö Street 22,

Budapest H-1138 Hungary