

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LF023821502

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	150 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	2,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	75	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,478 0,409
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	64	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2018-10-08 11:50:33
Specification	: LF023821502	Sam. Status	:
Sample No.	: LF023821502 2	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: SPL	Test by	:
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 53239 (81%)
Test Mode	: Fast Test	T	: 137 ms
		Sensitivity	: High

### Spectrum

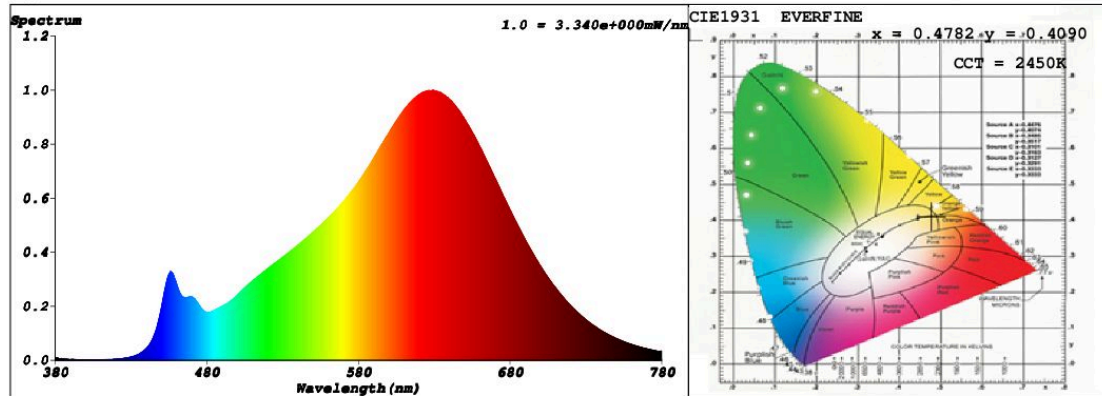

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4782$   $y = 0.4090$  /  $u' = 0.2752$   $v' = 0.5295$  ( $duv = -1.69e-03$ )

CCT= 2450K Prcp WL:  $L_d = 586.1nm$  Purity=66.3%

Peak WL:  $L_p = 626nm$  FWHM:  $= 130.4nm$  Ratio: R=29.1% G=68.5% B=2.4%

Render Index:  $R_a = 93.3$

R1 =95 R2 =99 R3 =97 R4 =93 R5 =95 R6 =96 R7 =90

R8 =81 R9 =64 R10=98 R11=95 R12=86 R13=97 R14=99 R15=91

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 137.04 lm Eff. : 67.42 lm/W Fe = 509.38 mW

### Electrical parameters

V = 240.0 V I = 0.009783 A P = 2.033 W PF = 0.8657

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)