Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: | OSRAM |
|--------------------------------|-------|
|--------------------------------|-------|

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC34198

| Tvi | рe | of | lig | ht | SO | urce | : |
|-------|----|----|-----|----|----|------|---|
| . , , | | • | о | | - | | • |


| Lighting technology used: | other FL | Non-directional or directional: | NDLS | | |
|-------------------------------|----------|---------------------------------|------|--|--|
| Light source cap-type | 2G13 | | | | |
| (or other electric interface) | | | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No | | |
| Colour-tuneable light source: | No | Envelope: | - | | |
| High luminance light source: | No | | | | |
| Anti-glare shield: | No | Dimmable: | Yes | | |
| Product parameters | | | | | |

Product parameters

| Product parameters | | | | | |
|---|---|---------------------------|--|--------------|--|
| Parameter | | Value | Parameter | Value | |
| General product parameters: | | | | | |
| Energy consur mode (kWh/10 up to the neare | 00 h), rounded | 61 | Energy efficiency class | G | |
| dicating if it refe a sphere (360º) | s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º) | 5 100 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 | |
| On-mode power (P _{on}), expressed in W | | 60,2 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | |
| Outer dimen- | Height | 765 | Spectral power dis- | See image | |
| sions without | Width | 26 | tribution in the | in last page | |
| separate con- trol gear, light- ing control | Depth | 26 | range 250 nm to 800 nm, at full-load | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | |
|--|---|------------------------------------|----------------|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,380 0,380 |

(a)'-': not applicable; (b)'-': not applicable;

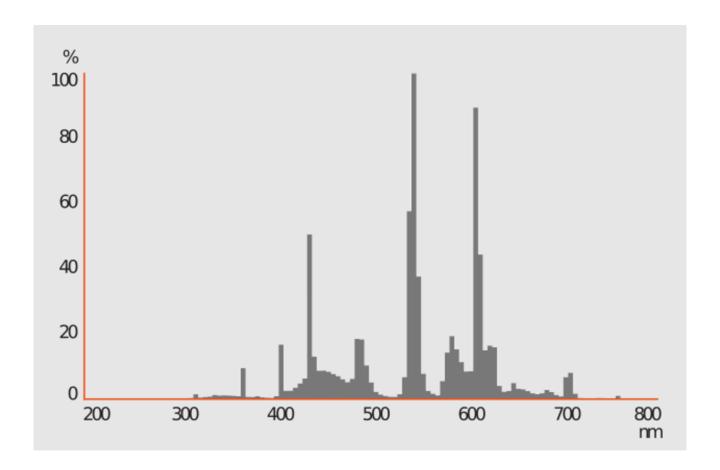

Model placed on the Union market from 03/09/2021



EPREL registration number: 546423 https://eprel.ec.europa.eu/qr/546423

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

Customer care service:

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany