## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: O | SRAM |
|----------------------------------|------|
|----------------------------------|------|

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC34240


| <b>T</b> | - 6        | 10 - 1- 1 |         |   |
|----------|------------|-----------|---------|---|
| IVna     | $\alpha$ T | IIσnt     | source: | , |
| IVDC     | vı         | HEILL     | Jourte. |   |

| Lighting technology used:     | CFLni   | Non-directional or directional: | NDLS  |
|-------------------------------|---------|---------------------------------|-------|
| Light source cap-type         | GX24q-2 |                                 |       |
| (or other electric interface) |         |                                 |       |
| Mains or non-mains:           | NMLS    | Connected light source (CLS):   | No    |
| Colour-tuneable light source: | No      | Envelope:                       | -     |
| High luminance light source:  | No      |                                 |       |
| Anti-glare shield:            | No      | Dimmable:                       | Yes   |
| Product parameters            |         |                                 |       |
| Parameter                     | Value   | Parameter                       | Value |
|                               |         |                                 |       |

|   |   | 1 Todact parar            |  | I            |
|---|---|---------------------------|--|--------------|
| Parameter   |   | Value                     | Parameter  | Value        |
|   |   | General product p         | arameters:   |              |
| <u> </u>  | nption in on-<br>00 h), rounded<br>st integer                         | 19                        | Energy efficiency class  | G            |
| dicating if it refe<br>a sphere (360º)            | s flux (фuse), ineers to the flux in, in a wide cone errow cone (90º) | 1 200 in<br>Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000        |
| On-mode pow<br>pressed in W                       | ver (P <sub>on</sub> ), ex-   | 19,0                      | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |
| (P <sub>net</sub> ) for CLS, 6                    | andby power expressed in W the second dec-                            | -                         | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |
| Outer dimen-                                      | Height  | 117                       | Spectral power dis-  | See image    |
| sions without                                     | Width   | 12                        | tribution in the   | in last page |
| separate con-<br>trol gear, light-<br>ing control | Depth   | 12                        | range 250 nm to 800<br>nm, at full-load  |              |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |   |                                    |                |
|--|---|------------------------------------|----------------|
| Claim of equivalent power <sup>(a)</sup>                                   | - | If yes, equivalent power (W)       | -              |
|  |   | Chromaticity coordinates (x and y) | 0,440<br>0,403 |

(a)'-': not applicable; (b)'-': not applicable;

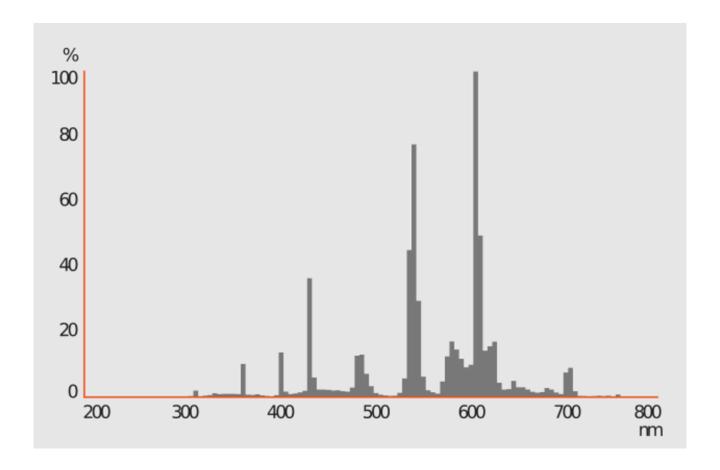

Model placed on the Union market from 03/09/2021



**EPREL registration number:** 546465 https://eprel.ec.europa.eu/qr/546465

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

**Customer care service:** 

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany