

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L641738722

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	380 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power ( $P_{on}$ ), expressed in W	7,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	55	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,507 0,413
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	550	Beam angle in degrees, or the range of beam angles that can be set	46
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	11	Survival factor	0,70
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a) '-': not applicable;

(b) '-': not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2021-07-01 13:19:21
Specification	: L641738722	Sam. Status	:
Sample No.	: L641738722-434	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Renee
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51598 (79%)
Test Mode	: Fast Test	T	: 33 ms
		Sensitivity	: High

### Spectrum

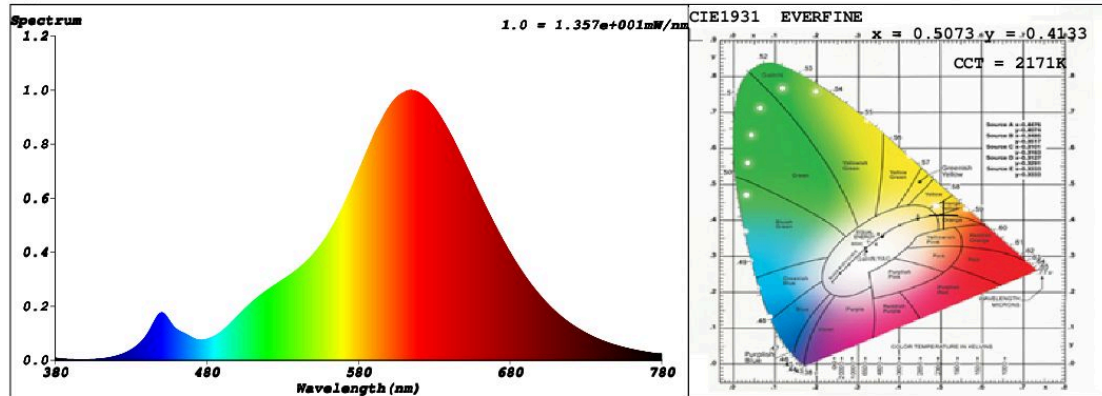

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.5073$   $y = 0.4133$  /  $u' = 0.2922$   $v' = 0.5356$  ( $duv = -5.90e-04$ )

CCT= 2171K Prcp WL: Ld=587.7nm Purity=76.3%

Peak WL: Lp=614nm FWHM: =106.8nm Ratio:R=30.8% G=67.8% B=1.4%

Render Index: Ra = 81.8

R1 =80 R2 =92 R3 =94 R4 =79 R5 =81 R6 =93 R7 =79

R8 =55 R9 =11 R10=84 R11=80 R12=83 R13=83 R14=98 R15=72

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 521.55 lm Eff. : 76.43 lm/W Fe = 1.7772 W

### Electrical parameters

V = 229.8 V I = 0.03308 A P = 6.823 W PF = 0.8977

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)