

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L148518830

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	300 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	90	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	18	
	Depth	18	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,424 0,407
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	21	Survival factor	0,90
the lumen maintenance factor	0,90		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,40	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	0,3

(a)-: not applicable;

(b)-: not applicable;


## SPL Spectrum Test Report

Sample :	Date : 2019-10-31 14:53:19
Specification : L148518830	Sam. Status :
Sample No. : L148518830 02	Instrument : HaasSuite(EVERFINE)
Manufacturer :	Test by : Schiefer
	Assessor : damin

### Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 50081 (76%)
Test Mode : Fast Test	T : 77 ms
	Sensitivity : High

### Spectrum

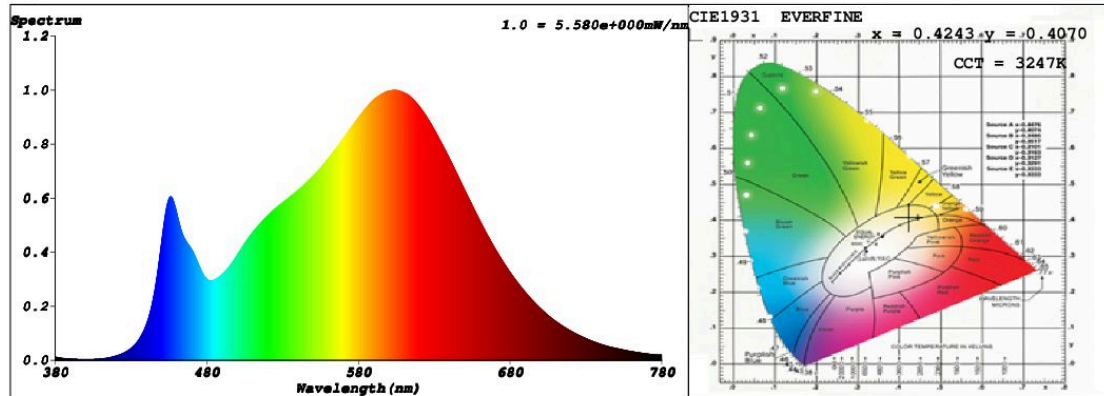

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4243$   $y = 0.4070$  /  $u' = 0.2413$   $v' = 0.5206$  ( $duv=3.14e-03$ )

CCT= 3247K Prcp WL: Ld=580.7nm Purity=49.5%

Peak WL: Lp=603nm FWHM: =147.6nm Ratio:R=21.7% G=75.1% B=3.2%

Render Index: Ra = 85.3

R1 =84 R2 =93 R3 =97 R4 =82 R5 =84 R6 =92 R7 =85

R8 =66 R9 =21 R10=84 R11=82 R12=69 R13=87 R14=99 R15=77

LEVEL:OUT WHITE:ANSI\_3500K

### Photometric & Radiometric Parameters

Flux = 294.44 lm Eff. : 79.27 lm/W Fe = 911.78 mW

### Electrical parameters

V = 229.8 V I = 0.01781 A P = 3.714 W PF = 0.9073

**Schiefer Professional Lighting**

www.spl-lighting.com