

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L277225922

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			45

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	45	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,505
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	12	Survival factor		0,96
the lumen maintenance factor	0,96			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses		6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)		-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)		0,3

(a)-: not applicable;

(b)-: not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2019-08-05 16:37:21
Specification	: LF277225922	Sam. Status	:
Sample No.	: LF277225922 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 56426 (86%)
Test Mode	: Fast Test	T	: 52 ms
		Sensitivity	: High

### Spectrum

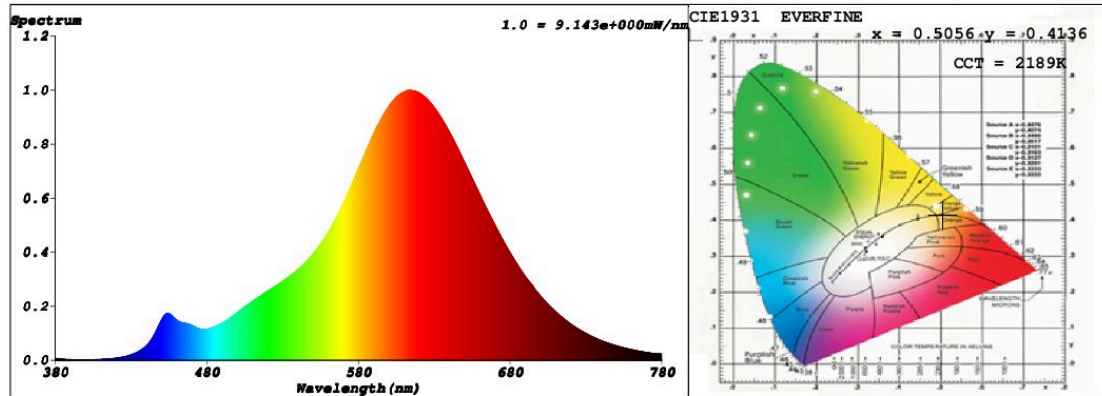

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.5056$   $y = 0.4136$  /  $u' = 0.2909$   $v' = 0.5354$  ( $duv = -5.09e-04$ )

CCT= 2189K Prcp WL:  $L_d = 587.5nm$  Purity=75.9%

Peak WL:  $L_p = 615nm$  FWHM: =107.7nm Ratio:R=30.6% G=67.7% B=1.7%

Render Index:  $R_a = 81.8$

R1 =81 R2 =94 R3 =91 R4 =78 R5 =81 R6 =95 R7 =79

R8 =55 R9 =12 R10=87 R11=78 R12=86 R13=84 R14=96 R15=73

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 354.75 lm Eff. : 91.92 lm/W  $F_e = 1.2081 W$

### Electrical parameters

V = 229.9 V I = 0.02076 A P = 3.859 W PF = 0.8088

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)