

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L149151827

Type of light source:

| | | | |
|---|-----|---------------------------------|----------------------------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Only with specific dimmers |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:

| | | | |
|--|----------------------|--|---|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 5 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 470 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 5,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 82 |
| Outer dimensions without separate control gear, light- | Height | 100 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 35 | |
| | Depth | 35 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| ing control parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,460 0,411 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 9 | Survival factor | 0,90 |
| the lumen maintenance factor | 0,93 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,90 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,4 |

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

| | | |
|----------------------------|---------------|---------------------|
| Sample : | Date : | 2021-06-02 15:54:02 |
| Specification : L149151827 | Sam. Status : | |
| Sample No. : L149151827 | Instrument : | HaasSuite(EVERFINE) |
| Manufacturer : | Test by : | Schiefer |
| | Assessor : | damin |

Test Condition

| | |
|------------------------|--------------------|
| Temperature : 25.3Deg | RH : 65.0% |
| WL Range : 380nm-780nm | IP : 45833 (70%) |
| Test Mode : Fast Test | T : 40 ms |
| | Sensitivity : High |

Spectrum

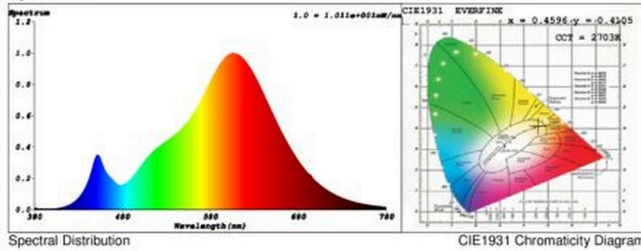

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4596$ $y = 0.4105$ / $u' = 0.2624$ $v' = 0.5273$ ($duv = -1.42e-05$)
 CCT= 2703K Prcp WL: Ld=584.2nm Purity=61.2%
 Peak WL: Lp=607nm FWHM: =116.5nm Ratio:R=25.2% G=72.6% B=2.2%

Render Index: Ra = 82.9

R1 =82 R2 =92 R3 =96 R4 =81 R5 =82 R6 =91 R7 =82
 R8 =58 R9 =9 R10=82 R11=81 R12=78 R13=84 R14=98 R15=73
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 460.00 lm Eff. : 84.65 lm/W $F_e = 1.4400$ W

Electrical parameters

V = 229.9 V I = 0.03019 A P = 5.434 W PF = 0.7829