

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L149351827

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	5,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,411
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	9	Survival factor	0,90
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;


**SPL Spectrum Test Report**

Sample :	Date :	2021-06-02 15:54:02
Specification : L149351827	Sam. Status :	
Sample No. : L149351827	Instrument :	HaasSuite(EVERFINE)
Manufacturer :	Test by :	Schiefer
	Assessor :	damin

**Test Condition**

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 45833 (70%)
Test Mode : Fast Test	T : 40 ms
	Sensitivity : High

**Spectrum**

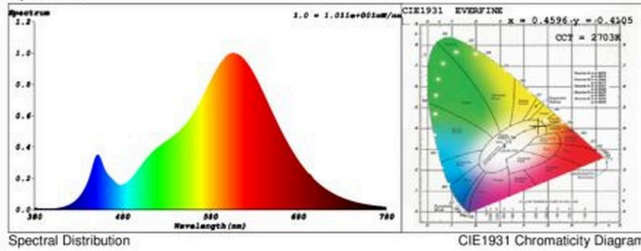

**Colorimetric Parameters**

Chromaticity Coordinate:  $x = 0.4596$   $y = 0.5105$  /  $u' = 0.2624$   $v' = 0.5273$  ( $duv = -1.42e-05$ )  
 CCT= 2703K Prcp WL: Ld=584.2nm Purity=61.2%  
 Peak WL: Lp=607nm FWHM: =116.5nm Ratio:R=25.2% G=72.6% B=2.2%

Render Index: Ra = 82.9

R1 =82 R2 =92 R3 =96 R4 =81 R5 =82 R6 =91 R7 =82  
 R8 =58 R9 =9 R10 =82 R11 =81 R12 =78 R13 =84 R14 =98 R15 =73  
 LEVEL:OUT WHITE:ANSI\_2700K

**Photometric & Radiometric Parameters**

Flux = 460.00 lm Eff. : 84.65 lm/W  $F_e = 1.4400$  W

**Electrical parameters**

V = 229.9 V I = 0.03019 A P = 5.434 W PF = 0.7829

**Schiefer Professional Lighting**  
[www.spl-lighting.com](http://www.spl-lighting.com)