

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L277230827

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	75	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,450 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	7	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample :	Date :	2021-07-26 09:19:59
Specification : L277230827	Sam. Status :	
Sample No. : 1	Instrument :	HaasSuite(EVERFINE)
Manufacturer :	Test by :	Renee
	Assessor :	damin

Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 50385 (77%)
Test Mode : Fast Test	T : 82 ms
	Sensitivity : High

Spectrum

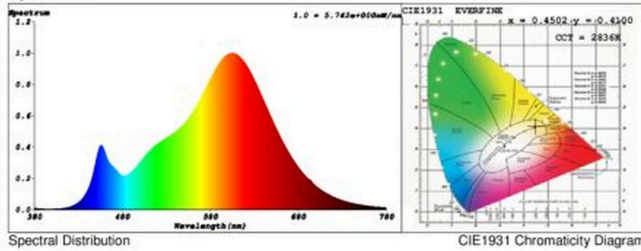

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4502$ $y = 0.4100$ / $u' = 0.2565$ $v' = 0.5257$ ($duv=6.95e-04$)
 CCT= 2836K Prcp WL: Ld=583.3nm Purity=58.2%
 Peak WL: Lp=606nm FWHM: =115.7nm Ratio:R=24.2% G=73.2% B=2.7%

Render Index: Ra = 82.8

R1 =82 R2 =93 R3 =93 R4 =80 R5 =83 R6 =93 R7 =81
 R8 =57 R9 =7 R10=85 R11=80 R12=76 R13=85 R14=97 R15=73
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 266.98 lm Eff. : 117.32 lm/W Fe = 815.45 mW

Electrical parameters

V = 229.8 V I = 0.01229 A P = 2.276 W PF = 0.8054