

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023851502

Type of light source:

| | | | |
|---|-----|---------------------------------|----------------------------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Only with specific dimmers |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:

| | | | |
|--|----------------------|--|---|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 2 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 140 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 500 |
| On-mode power (P_{on}), expressed in W | 1,5 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 93 |
| Outer dimensions without separate control gear, light- | Height | 120 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 35 | |
| | Depth | 35 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| ing control parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,466 0,407 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 59 | Survival factor | 0,96 |
| the lumen maintenance factor | 0,96 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,85 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 0,1 | Stroboscopic effect metric (SVM) | 0,3 |

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

| | | | |
|---------------|-----------------|-------------|-----------------------|
| Sample | : | Date | : 2017-12-12 13:43:53 |
| Specification | : | Sam. Status | : |
| Sample No. | : LF023851502-1 | Instrument | : HaasSuite(EVERFINE) |
| Manufacturer | : | Test by | : |
| | | Assessor | : damin |

Test Condition

| | | | |
|-------------|---------------|-------------|---------------|
| Temperature | : 25.3Deg | RH | : 65.0% |
| WL Range | : 380nm-780nm | IP | : 50049 (76%) |
| Test Mode | : Fast Test | T | : 166 ms |
| | | Sensitivity | : High |

Spectrum

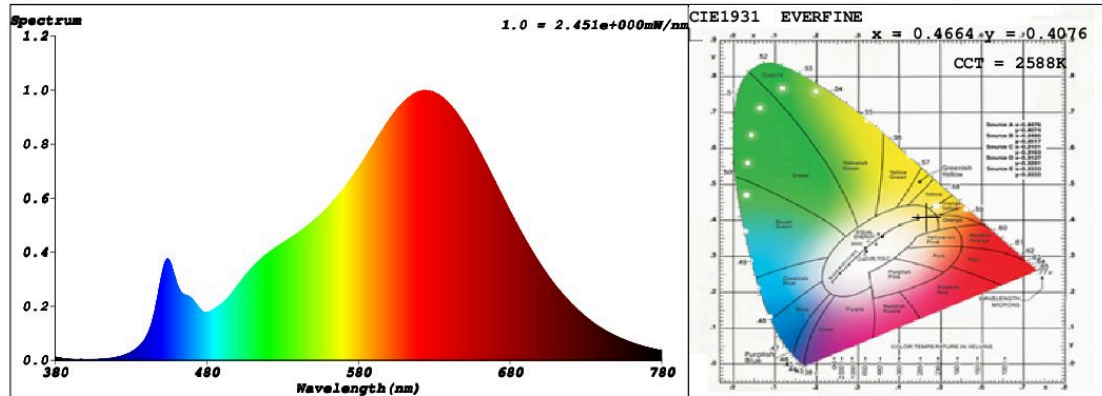

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4664$ $y = 0.4076$ / $u' = 0.2681$ $v' = 0.5272$ ($duv = -1.59e-03$)

CCT= 2588K Prcp WL: Ld=585.3nm Purity=62.3%

Peak WL: Lp=624nm FWHM: =138.3nm Ratio:R=27.6% G=70.0% B=2.4%

Render Index: Ra = 93.0

R1 =94 R2 =98 R3 =98 R4 =93 R5 =94 R6 =97 R7 =90

R8 =80 R9 =59 R10=95 R11=95 R12=86 R13=95 R14=100 R15=89

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 107.52 lm Eff. : 68.80 lm/W Fe = 391.39 mW


Electrical parameters

V = 230.1 V I = 0.008251 A P = 1.563 W PF = 0.8232

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 20/04/2021



EPREL registration number: 658527

<https://eprel.ec.europa.eu/qr/658527>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands