## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Source

Supplier's address: SGD Limited, Unit 7/8 Ashbourne Business Centre, Ballybin Road, Ashbourne,

Co. Meath. A84 YP58. Ireland.

Model identifier: S8LED BH WH

_	•			
Typa	Λt	liaht	sourc	Δ.
IVDE	OI.	IIGIIL	<b>3</b> Uui C	c.


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	TERMINAL		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
Energy consur mode (kWh/10 up to the neares	00 h), rounded	8	Energy efficiency class	F	
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500	
On-mode power (P <sub>on</sub> ), ex- pressed in W		8,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	_	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	73	Spectral power dis-	See image	
sions without	Width	212	tribution in the	in last page	
separate con- trol gear, light-	Depth	74	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-		
			Chromaticity coordinates (x and y)	0,313 0,337		
Parameters for LED and OLED light sources:						
R9 colour rendering index value		1	Survival factor	0,90		
the lumen maintenance factor		0,96				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,9		

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

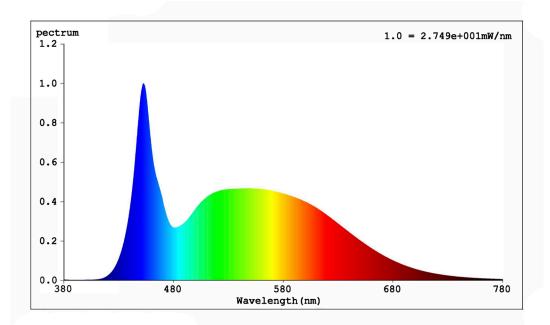

## Model placed on the Union market from 01/07/2017



**EPREL registration number:** 669352 https://eprel.ec.europa.eu/qr/669352

Supplier: Solas Geal Distribution Limited (Manufacturer) Website: www.sgd.ie

**Customer care service:** 

Name: SGD Limited Website: www.sgd.ie

Email: info@sgd.ie Phone: 0035318357447

Address:

Unit 7/8 Ashbourne Business Centre,

Ballybin Road, Ashbourne, Co. Meath. A84 YP58. Ireland.