Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or | trade mark: | Aurora |
|--------------------|-------------|--------|
|--------------------|-------------|--------|

Supplier's address: Aurora, Rue Isaac Newton, 1 31830 Plaisance-du-Touch France

Model identifier: EN-ST100/30


| Type of light sou | ırce: | : |
|-------------------|-------|---|
|-------------------|-------|---|

ing control

| - 17F | | | | | |
|--|--|-------------------------|--|--------------|--|
| Lighting techno | logy used: | LED | Non-directional or directional: | NDLS | |
| Light source cap | o-type | LED strip | | | |
| (or other electri | (or other electric interface) | | | | |
| Mains or non-m | nains: | NMLS | Connected light source (CLS): | No | |
| Colour-tuneable light source: | | No | Envelope: | - | |
| High luminance light source: | | No | | | |
| Anti-glare shield | d: | No | Dimmable: | Yes | |
| | | Product para | meters | | |
| Parameter | | Value | Parameter | Value | |
| | | General product p | arameters: | | |
| _ · | mption in on- 00 h), rounded st integer | 3 | Energy efficiency class | F | |
| dicating if it refe a sphere (360º) | s flux (фuse), ineers to the flux in , in a wide cone arrow cone (90º) | 240 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 | |
| On-mode pow pressed in W | ver (P _{on}), ex- | 2,4 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | |
| (P _{net}) for CLS, 6 | tandby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | |
| Outer dimen- | Height | 1 | Spectral power dis- | See image | |
| sions without | Width | 8 | tribution in the | in last page | |
| separate con- trol gear, light- | Depth | 500 | range 250 nm to 800 nm, at full-load | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | |
|--|------|------------------------------|-------|--|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | | |
| | | Chromaticity coordi- | 0,440 | | | |
| | | nates (x and y) | 0,402 | | | |
| Parameters for LED and OLED light sources: | | | | | | |
| R9 colour rendering index value | 26 | Survival factor | 1,00 | | | |
| the lumen maintenance factor | 0,96 | | | | | |

(a)'-': not applicable; (b)'-': not applicable;

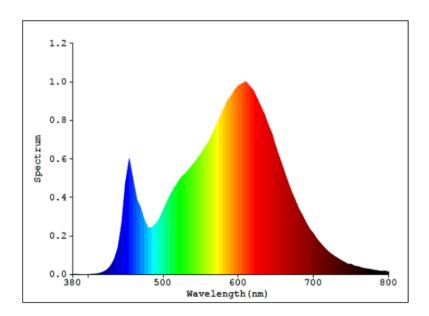

Model placed on the Union market from 01/09/2021



EPREL registration number: 702711 https://eprel.ec.europa.eu/qr/702711

Supplier: GALAED (Importer) Website:

Customer care service:

Name: Aurora Website:

Email: compliance@auroralighting.com Phone: +44 (0) 1707 228 700

Address:

Rue Isaac Newton, 1 31830 Plaisance-du-Touch

France