

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L641235927

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	650 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	64	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	110	
	Depth	110	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,456 0,410
Parameters for directional light sources:			
Peak luminous intensity (cd)	950	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	54	Survival factor	1,00
the lumen maintenance factor	0,75		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a)'.': not applicable;

(b)'.': not applicable;


SPL Spectrum Test Report

Sample	:		Date	:	2021-07-23 08:50:26
Specification	:	L641235927	Sam. Status	:	
Sample No.	:		Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Renee	Test by	:	Renee
			Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	47310 (72%)
Test Mode	:	Fast Test	T	:	22 ms
			Sensitivity	:	High

Spectrum

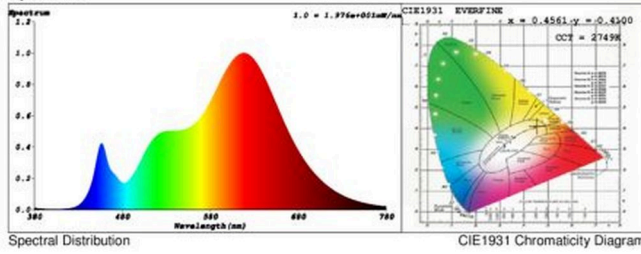

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4561$ $y = 0.4100$ / $u' = 0.2603$ $v' = 0.5266$ ($duv=1.09e-04$)
 CCT= 2749K Prcp WL: Ld=583.9nm Purity=60.0%
 Peak WL: Lp=619nm FWHM: =139.6nm Ratio:R=26.7% G=70.8% B=2.5%

Render Index: Ra = 93.9

R1 =96 R2 =99 R3 =98 R4 =97 R5 =97 R6 =96 R7 =90
 R8 =79 R9 =54 R10=98 R11=97 R12=85 R13=98 R14=99 R15=89
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 875.82 lm Eff. : 107.35 lm/W Fe = 2.9166 W

Electrical parameters

V = 229.8 V I = 0.03645 A P = 8.159 W PF = 0.9741