

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SLV

**Supplier's address:** EPREL-Contact, Daimlerstraße 21-23, 52531 Übach-Palenberg, DE

**Model identifier:** 1004716

## Type of light source:

|                                                     |             |                                 |      |
|-----------------------------------------------------|-------------|---------------------------------|------|
| Lighting technology used:                           | LED         | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | Unspecified |                                 |      |
| Mains or non-mains:                                 | NMLS        | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No          | Envelope:                       | -    |
| High luminance light source:                        | No          |                                 |      |
| Anti-glare shield:                                  | No          | Dimmable:                       | No   |


## Product parameters

| Parameter                                                                                                                                      | Value                  | Parameter                                                                                                                                                  | Value                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>General product parameters:</b>                                                                                                             |                        |                                                                                                                                                            |                                                                         |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 91                     | Energy efficiency class                                                                                                                                    | F                                                                       |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 8 500 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700                                                                   |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 91,0                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                                                                    |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 90                                                                      |
| Outer dimensions without separate control gear, lighting control                                                                               | Height                 | 1                                                                                                                                                          | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|                                                                                                                                                | Width                  | 10                                                                                                                                                         |                                                                         |
|                                                                                                                                                | Depth                  | 5 000                                                                                                                                                      |                                                                         |
|                                                                                                                                                |                        |                                                                                                                                                            | See image in last page                                                  |


|                                                           |      |                                    |                |
|-----------------------------------------------------------|------|------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |                                    |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)       | -              |
|                                                           |      | Chromaticity coordinates (x and y) | 0,460<br>0,410 |
| <b>Parameters for LED and OLED light sources:</b>         |      |                                    |                |
| R9 colour rendering index value                           | 69   | Survival factor                    | 1,00           |
| the lumen maintenance factor                              | 0,99 |                                    |                |

(a) : not applicable;

(b) : not applicable;

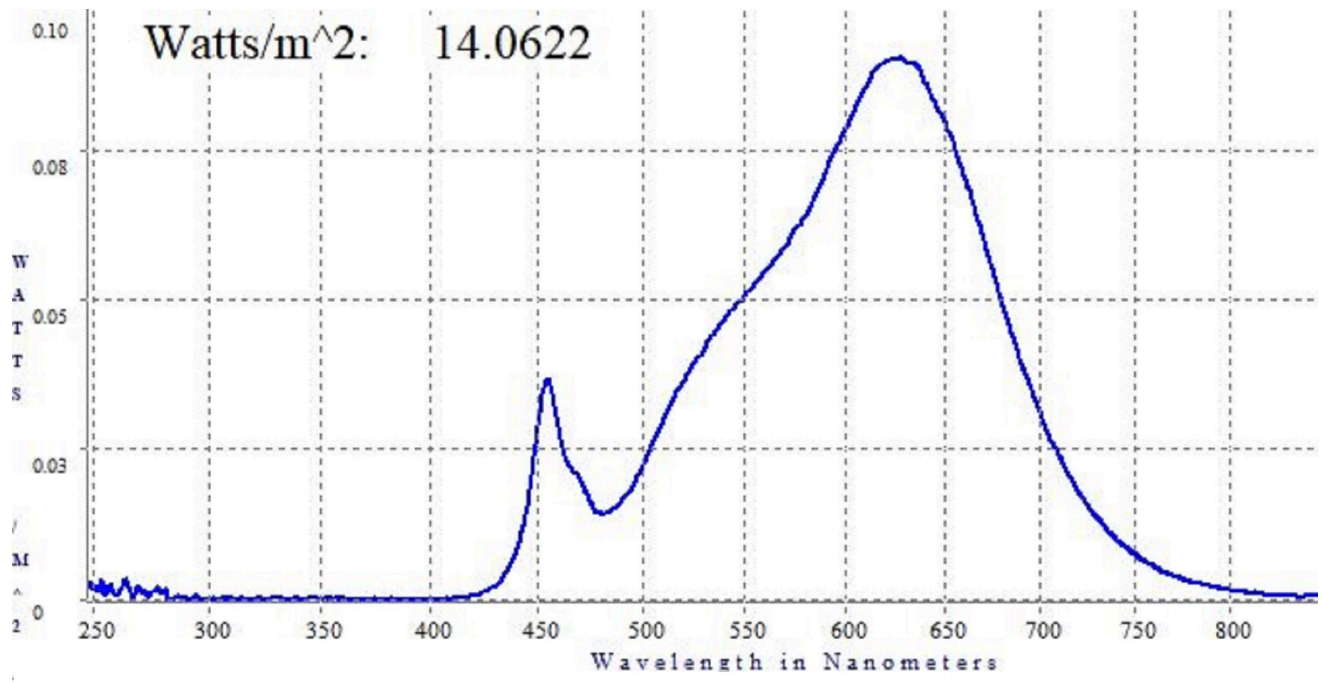

Model placed on the Union market from 01/10/2020



**EPREL registration number:** 708788

<https://eprel.ec.europa.eu/qr/708788>

**Supplier:** SLV GmbH (Importer)

**Website:** [www.slv.com](http://www.slv.com)

**Customer care service:**

**Name:** EPREL-Contact

**Website:** [www.slv.com](http://www.slv.com)

**Email:** [eprel@slv.de](mailto:eprel@slv.de)

**Phone:** +49 (2451) 4833 154

**Address:**

Daimlerstraße 21-23  
52531 Übach-Palenberg  
Germany