

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SIGOR

**Supplier's address:** SIGOR Licht GmbH, Eichenhofer Weg 81, 42279 Wuppertal, DE

**Model identifier:** 4502701

## Type of light source:

|   |      |                                 |      |
|---|------|---------------------------------|------|
| Lighting technology used:                           | LED  | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | -    |                                 |      |
| Mains or non-mains:                                 | NMLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No   | Envelope:                       | -    |
| High luminance light source:                        | No   |                                 |      |
| Anti-glare shield:                                  | No   | Dimmable:                       | Yes  |


## Product parameters

| Parameter  | Value                    | Parameter  | Value   |
|--|--------------------------|--|---|
| <b>General product parameters:</b>   |                          |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 3                        | Energy efficiency class  | F   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 151 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700   |
| On-mode power ( $P_{on}$ ), expressed in W   | 2,2                      | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,04  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                        | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 85  |
| Outer dimensions without separate control gear, lighting control   | Height                   | 340  | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                    | 141  |   |
|  | Depth                    | 141  |   |
|  |                          |  | See image in last page  |


|   |      |                                    |                |
|---|------|------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |                                    |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)       | -              |
|   |      | Chromaticity coordinates (x and y) | 0,440<br>0,403 |
| <b>Parameters for LED and OLED light sources:</b>         |      |                                    |                |
| R9 colour rendering index value                           | 10   | Survival factor                    | 0,90           |
| the lumen maintenance factor                              | 0,94 |                                    |                |

(a) : not applicable;

(b) : not applicable;

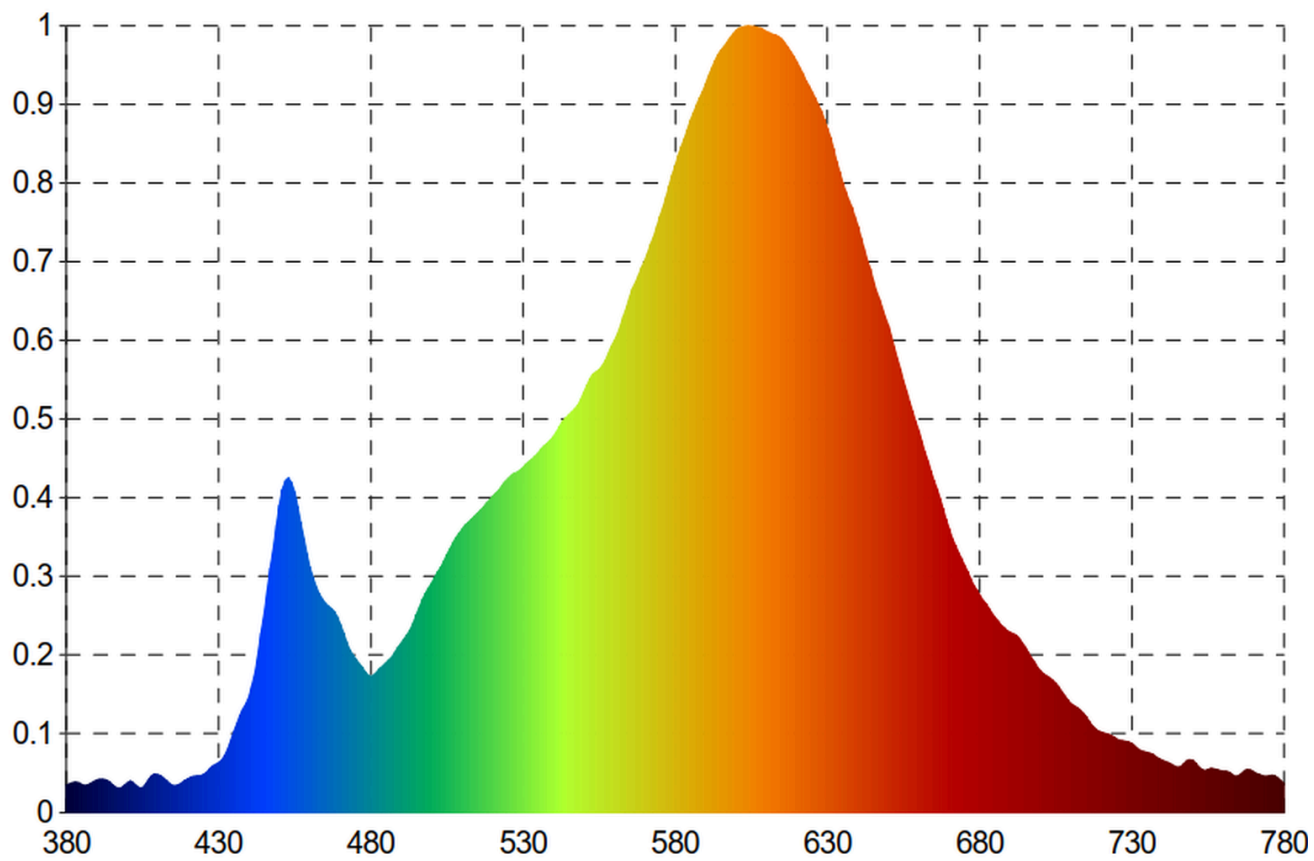

Model placed on the Union market from 01/07/2020



**EPREL registration number:** 713539

<https://eprel.ec.europa.eu/qr/713539>

**Supplier:** SIGOR Licht GmbH (Manufacturer)

**Website:**

**Customer care service:**

**Name:** SIGOR Licht GmbH

**Website:** <https://shop.sigor.de/>

**Email:** [qm@sigor.de](mailto:qm@sigor.de)

**Phone:** 02339 12610

**Address:**

Eichenhofer Weg 81  
42279 Wuppertal  
Germany