

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Menu A/S

Supplier's address: PD, Aarhusgade 130, 2150 Nordhavn -, DK

Model identifier: 2701639 E14

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Screw cap - E14		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,25
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	40
		Chromaticity coordinates (x and y)	0,460 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	58	Survival factor	0,90
the lumen maintenance factor	0,93		

(a) : not applicable;

(b) : not applicable;


Spectrum Test Report

Sample	:	Date	:
Specification	:	Sam. Status	:
Sample No.	: 21631301 1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 54273 (83%)
Test Mode	: Accuracy Test	T	: 204 ms
		Delicacy	: High

Spectrum

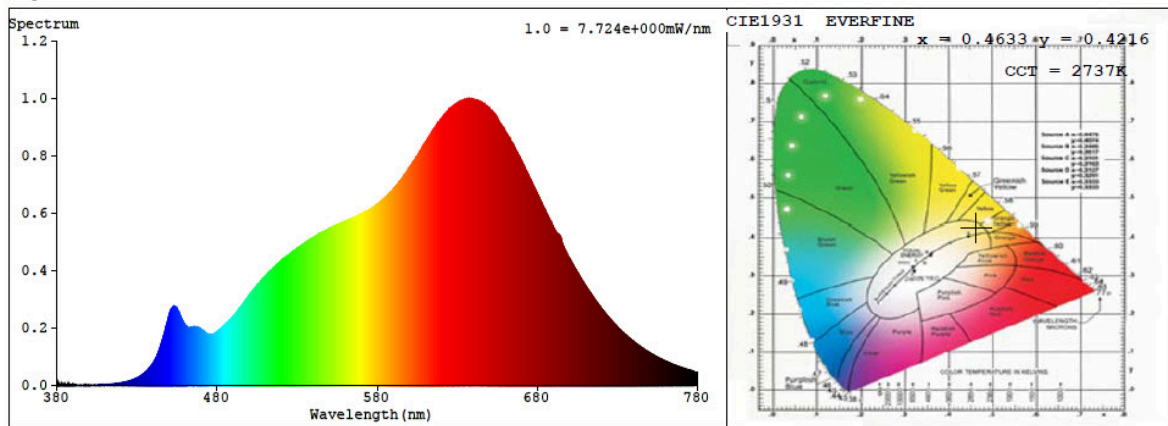

Spectral Distribution

CIE1931 Chromaticity Diagram


Colorimetric Quantities

Chromaticity Coordinate: $x = 0.4633$ $y = 0.4216$ / $u' = 0.2598$ $v' = 0.5320$ ($duv=3.73e-03$)

CCT= 2737K Prcp WL: $L_d=582.9nm$ Purity=65.6%

Peak WL: $L_p=637nm$ FWHM: $=159.6nm$ Ratio:R=26.7% G=70.7% B=2.5%

Model placed on the Union market from 01/09/2021



EPREL registration number: 727970

<https://eprel.ec.europa.eu/qr/727970>

Supplier: AUDO A/S (Importer)

Website: <https://audocph.com/>

Customer care service:

Name: PD

Website: www.menuspace.com

Email: bda@menuspace.com

Phone: +4527804705

Address:

Aarhusgade 130

2150 Nordhavn

Denmark