

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L022453027

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G4		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	1,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	34	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	11	
	Depth	11	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,461 0,407
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	8	Survival factor	0,90
the lumen maintenance factor	0,93		

(a) : not applicable;

(b) : not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2020-02-24 16:05:46
Specification	: L022453027	Sam. Status	:
Sample No.	: L022453027 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52256 (80%)
Test Mode	: Fast Test	T	: 197 ms
		Sensitivity	: High

### Spectrum

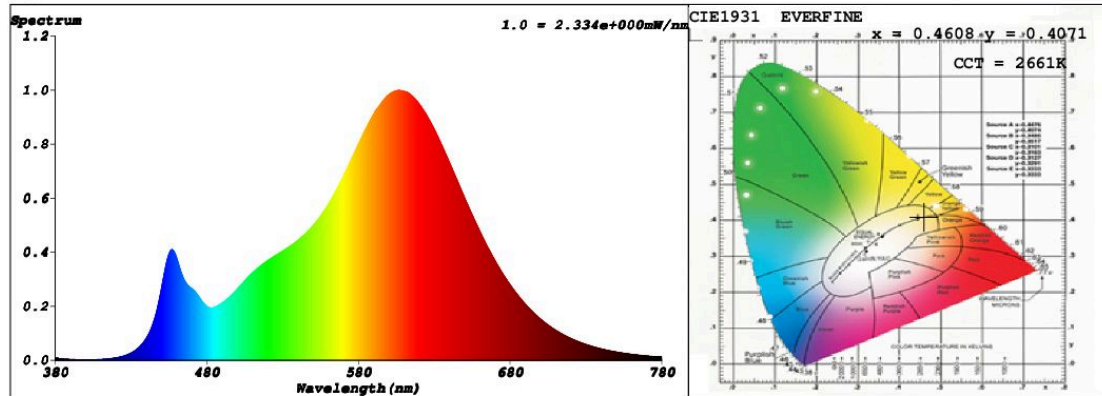

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4608$   $y = 0.4071$  /  $u' = 0.2647$   $v' = 0.5262$  ( $duv = -1.35e-03$ )

CCT= 2661K Prcp WL: Ld=584.8nm Purity=60.5%

Peak WL: Lp=607nm FWHM: =108.2nm Ratio:R=25.7% G=71.7% B=2.6%

Render Index: Ra = 82.5

R1 =82 R2 =95 R3 =91 R4 =79 R5 =83 R6 =95 R7 =79

R8 =56 R9 =8 R10=89 R11=79 R12=79 R13=86 R14=96 R15=74

LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 103.23 lm Eff. : 127.84 lm/W Fe = 320.70 mW

### Electrical parameters

V = 12.00 V I = 0.06730 A P = 0.8075 W PF = 1.000

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)

Model placed on the Union market from 26/04/2021



**EPREL registration number:** 728290

<https://eprel.ec.europa.eu/qr/728290>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands