

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Menu A/S

Supplier's address: PD, Aarhusgade 130, 2150 Nordhavn -, DK

Model identifier: 1320639 Peek Floor

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	COB		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	560 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,25
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	40	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	120	
	Depth	120	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,410 0,480
Parameters for directional light sources:			
Peak luminous intensity (cd)	1	Beam angle in degrees, or the range of beam angles that can be set	103
Parameters for LED and OLED light sources:			
R9 colour rendering index value	5	Survival factor	1,00
the lumen maintenance factor	0,97		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;


(b) '-': not applicable;

Spectral power distribution

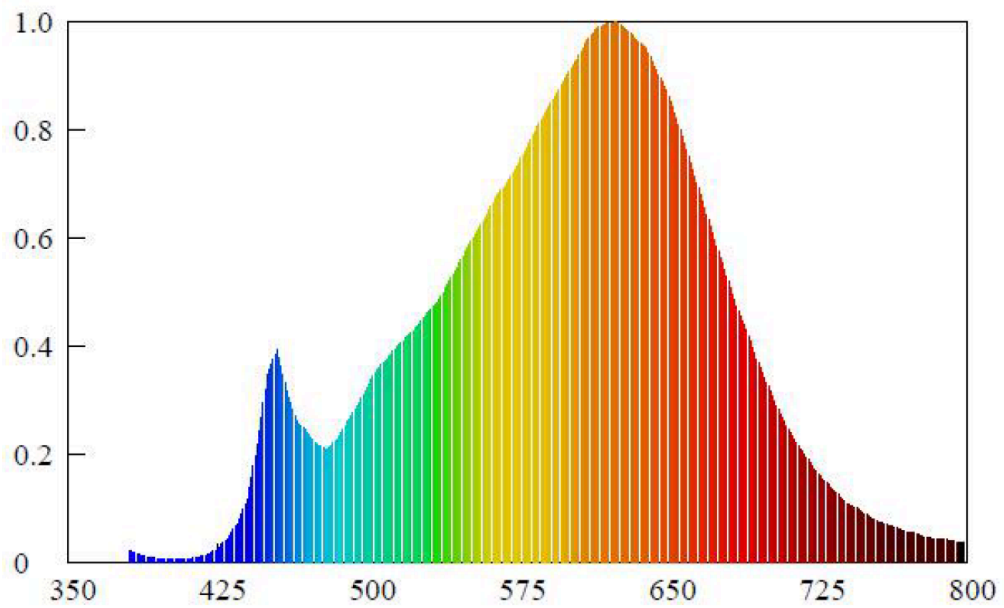

Spectral Distribution

Model placed on the Union market from 01/09/2021



EPREL registration number: 728538

<https://eprel.ec.europa.eu/qr/728538>

Supplier: AUDO A/S (Importer)

Website: <https://audocph.com/>

Customer care service:

Name: PD

Website: www.menuspace.com

Email: bda@menuspace.com

Phone: +4527804705

Address:

Aarhusgade 130

2150 Nordhavn

Denmark