

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: 022336247-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	180 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	2,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	49	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	16	
	Depth	12	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,457 0,411
Parameters for LED and OLED light sources:			
R9 colour rendering index value	13	Survival factor	0,90
the lumen maintenance factor	0,97		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2019-02-26 11:42:43
Specification	: 022336247-1	Sam. Status	:
Sample No.	: 022336247-1 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 45674 (70%)
Test Mode	: Fast Test	T	: 100 ms
		Sensitivity	: High

Spectrum

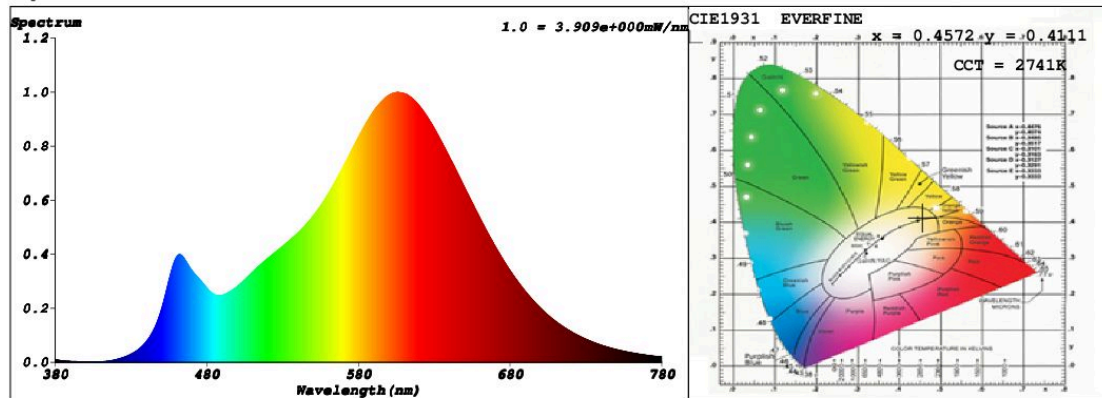

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4572$ $y = 0.4111$ / $u' = 0.2606$ $v' = 0.5272$ ($duv=4.24e-04$)

CCT= 2741K Prcp WL: $L_d=583.9nm$ Purity=60.7%

Peak WL: $L_p=606nm$ FWHM: $=119.8nm$ Ratio:R=24.9% G=72.3% B=2.8%

Render Index: $R_a = 83.0$

R1 =83 R2 =95 R3 =92 R4 =79 R5 =83 R6 =95 R7 =80

R8 =59 R9 =13 R10=88 R11=77 R12=78 R13=86 R14=96 R15=75

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 180.79 lm Eff. : 75.40 lm/W Fe = 574.12 mW

Electrical parameters

V = 230.0 V I = 0.01204 A P = 2.398 W PF = 0.8658

Schiefer Professional Lighting

www.professional-lighting.eu