# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** &Tradition

**Supplier's address:** &Tradition, Kronprinsessegade 4, 1306 Copenhagen Denmark, DK

**Model identifier:** Passepartout JH10 / JH11 LED Module

**Type of light source:**

| | | | |
|---|---|---|---|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | N/A | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |

**Product parameters**

| Parameter | Value | Parameter | Value |
|---|---|---|---|
| **General product parameters:** | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 11 | Energy efficiency class | F |
| Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º) | 964 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2100...2900 |
| On-mode power ($P_{on}$), expressed in W | 10,7 | Standby power ($P_{sb}$), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power ($P_{net}$) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 94 |
| Outer dimensions without separate control gear, lighting control — Height | 57 | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| Outer dimensions without separate control gear, lighting control — Width | 70 | | |
| Outer dimensions without separate control gear, lighting control — Depth | 70 | | |

| | | | | |
|---|---|---|---|---|
| parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power[(a)] | | - | If yes, equivalent power (W) | - |
| | | | Chromaticity coordinates (x and y) | 0,444<br>0,402 |
| **Parameters for LED and OLED light sources:** | | | | |
| R9 colour rendering index value | | 63 | Survival factor | 0,90 |
| the lumen maintenance factor | | 0,95 | | |
| **Parameters for LED and OLED mains light sources:** | | | | |
| displacement factor (cos ϕ1) | | 0,93 | Colour consistency in McAdam ellipses | 3 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | | -[(b)] | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | | 2,3 | Stroboscopic effect metric (SVM) | 0,1 |

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

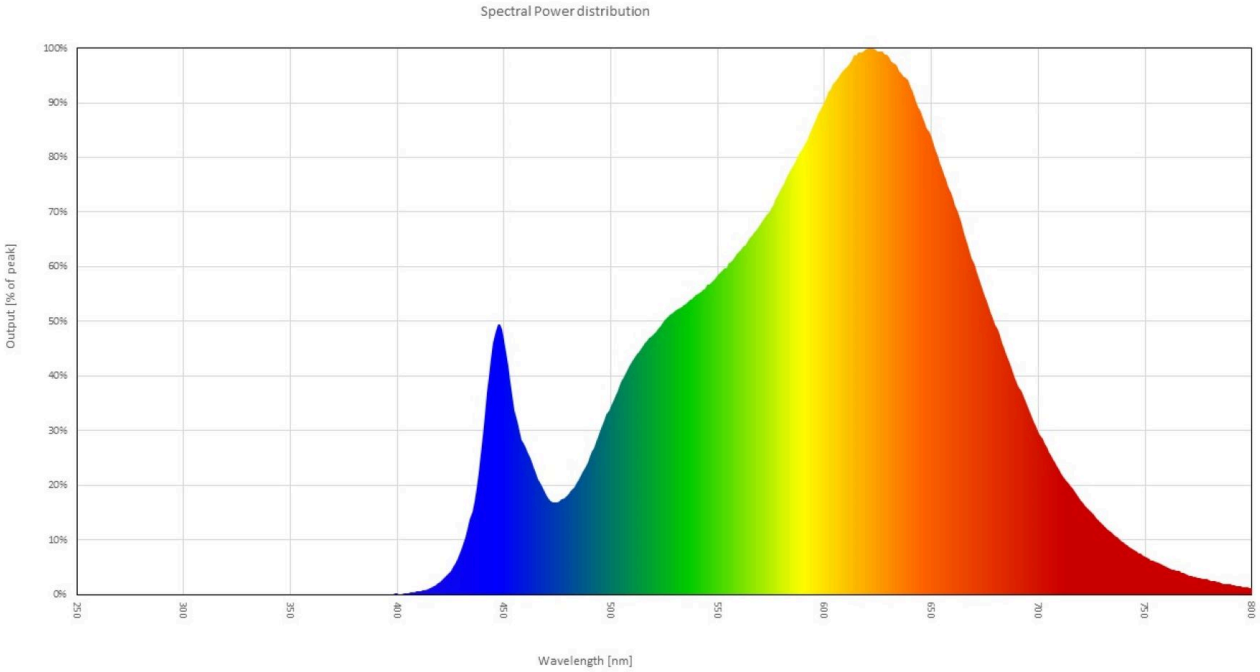
Spectral Power distribution
Output [% of peak]
100%
90%
80%
70%
60%
50%
40%
30%
20%
10%
0%
250
300
350
400
450
500
550
600
650
700
750
800
Wavelength [nm]

Model placed on the Union market from 01/09/2021

**EPREL registration number:** 764869

https://eprel.ec.europa.eu/qr/764869

**Supplier:** &Tradition A/S (Manufacturer)

**Website:**

**Customer care service:**

**Name:** &Tradition

**Website:** https://www.andtradition.com/

**Email:** info@andtradition.com

**Phone:** +4539200233

**Address:**
Kronprinsessegade 4
1306 Copenhagen
Denmark