

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L149347027

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	5,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,456 0,408
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	0,90
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;


### SPL Spectrum Test Report

Sample :	Date :	2021-01-04 16:10:16
Specification : L149347027	Sam. Status :	
Sample No. : L149347027	Instrument :	HaasSuite(EVERFINE)
Manufacturer :	Test by :	Schiefer
	Assessor :	damin

#### Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 390nm-780nm	IP : 51085 (78%)
Test Mode : Fast Test	T : 45 ms
	Sensitivity : High

#### Spectrum

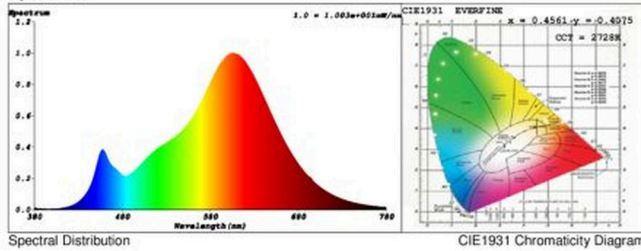

#### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4561$   $y = 0.4075$  /  $u' = 0.2615$   $v' = 0.5256$  ( $duv = -8.40e-04$ )  
 CCT = 2728K Prcp WL: Ld=584.3nm Purity=59.2%  
 Peak WL: Lp=606nm FWHM: =111.8nm Ratio:R=25.2% G=72.2% B=2.7%

Render Index: Ra = 83.2

R1 =83 R2 =95 R3 =92 R4 =80 R5 =84 R6 =95 R7 =80  
 R8 =57 R9 =10 R10=88 R11=81 R12=81 R13=86 R14=96 R15=75  
 LEVEL:OUT WHITE:ANSI\_2700K

#### Photometric & Radiometric Parameters

Flux = 452.50 lm Eff. : 98.94 lm/W  $F_e = 1.4148$  W


#### Electrical parameters

V = 229.8 V I = 0.02818 A P = 4.573 W PF = 0.7061

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)

Model placed on the Union market from 31/05/2021



**EPREL registration number:** 767188

<https://eprel.ec.europa.eu/qr/767188>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands