

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L641134527

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU4		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	345 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	4,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	38	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,454 0,411
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	660	Beam angle in degrees, or the range of beam angles that can be set	36
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	13	Survival factor	0,90
the lumen maintenance factor	0,93		

(a) : not applicable;

(b) : not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2021-07-13 14:50:41
Specification	:	Sam. Status	:
Sample No.	: L641134527	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Ralf
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 47208 (72%)
Test Mode	: Fast Test	T	: 46 ms
		Sensitivity	: High

### Spectrum

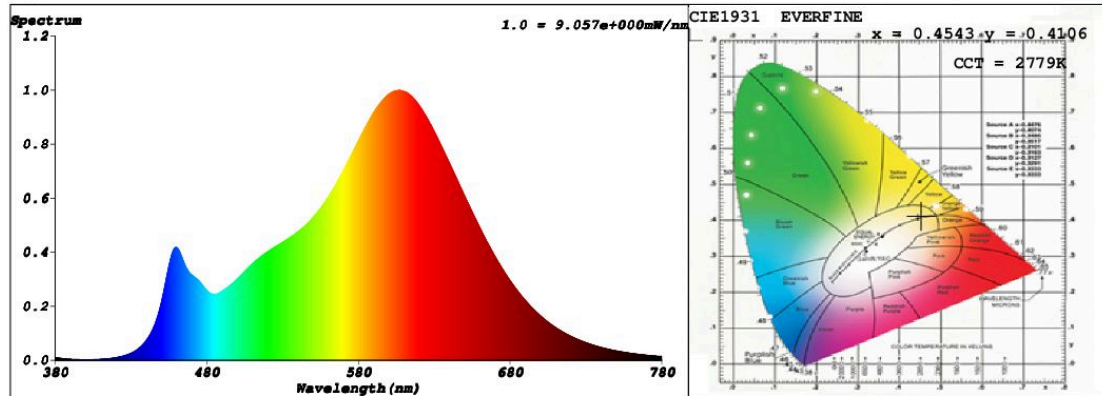

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4543$   $y = 0.4106$  /  $u' = 0.2589$   $v' = 0.5265$  ( $duv=4.95e-04$ )

CCT= 2779K Prcp WL: Ld=583.7nm Purity=59.6%

Peak WL: Lp=607nm FWHM: =114.4nm Ratio:R=24.8% G=72.3% B=2.9%

Render Index: Ra = 83.7

R1 =84 R2 =96 R3 =91 R4 =80 R5 =84 R6 =96 R7 =80

R8 =58 R9 =13 R10=90 R11=81 R12=79 R13=87 R14=96 R15=75

LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 414.28 lm Eff. : 93.23 lm/W Fe = 1.2891 W

### Electrical parameters

V = 12.10 V I = 0.5186 A P = 4.443 W PF = 0.7082

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)